


5' FLARE SLOPES AND 5' LANDINGS ARE REQUIRED UNLESS OTHERWISE APPROVED BY THE ENGINEERING DEPARTMENT.

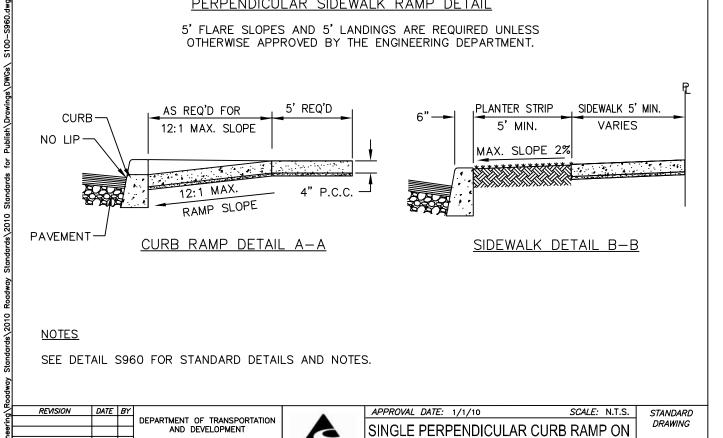

NOTES

SEE DETAIL S960 FOR STANDARD DETAILS AND NOTES.

REVISION	DATE	BY	DEPARTMENT OF TRANSPORTATION AND DEVELOPMENT		APPROVAL DATE: 1/1/10	SCALE: N.T.S.	STANDARD
					SINGLE PERPENDICULAR CURB RAMP ON		DRAWING
					ATANDA DE AIREMANIA (1414)		S900
					STANDARD SIDEWALK WITH PLANTER STRIP		3900