

LEGEND DIMENSIONING TABLE

LOCATION	STREET CLASSIFICATION	POSTED SPEED (MPH)	PANEL HT.	PRIMARY LETTER HT.	LOWER-CASE LETTER HT.	SUPPLEMENTAL LETTERING SIZE		SUPER-SCRIPT HT.	G	H	BORDER/DIVIDER THICKNESS	BOR- DER RAD.	ARROW TAIL THICK- NESS	ARROW LENGTH	
			A	B	C	D	E								F
			UPPER		LOWER										
GROUND MOUNT	ARTERIAL/COLLECTOR 4+ LANES	> 40	15	8	6	5	3 ¾	4	3 ½	1	½	1 ½			
	ARTERIAL/COLLECTOR 4+ LANES	≤ 40													
	ARTERIAL/COLLECTOR 2-3 LANES	ALL	12	6	4 ½	4	3	3	2 ½	¾	½	1 ½			
	LOCAL	> 25													
	ALTERNATE *		10	5	4	4	3	2 ½	2	½	½	1 ½			
	STACKED LEGEND	ALL	21	6	4 ½	4	3	3	2 ½	¾	½	1 ½	2 ¼	9	
	LOCAL/CONNECTOR	≤ 25													
PRIVATE	ALL		8	5	3 ¾	3	1 ⅞	2 ½	1 ½	½					
OVERHEAD MAST ARM	ALL	ALL	21	12	9	8	6	6	5	1 ¾	1	3			
	ALTERNATE **		18	10	8	6	4 ½	5	3 ¾	1 ¼	1	3			
	STACKED LEGEND	ALL	30	8	6	5	3 ¾	4	3 ½	1	1	3	3	12	


NOTES: ALL UNITS IN INCHES UNLESS SHOWN OTHERWISE.

S = SPACE BETWEEN WORDS = ⅝ B.

X, Y = ½ OF REMAINING SPACE. SHOULD BE APPROXIMATELY EQUAL TO LETTER HT (B) AND NO LESS THAN ½ B.

* GROUND MOUNTED: MAY BE USED IF 6" LETTERS YIELD SIGNS GREATER THAN 60" LENGTH.

** OVERHEAD: MAY BE USED IF 12" LETTERS YIELD SIGNS GREATER THAN 12' LENGTH.

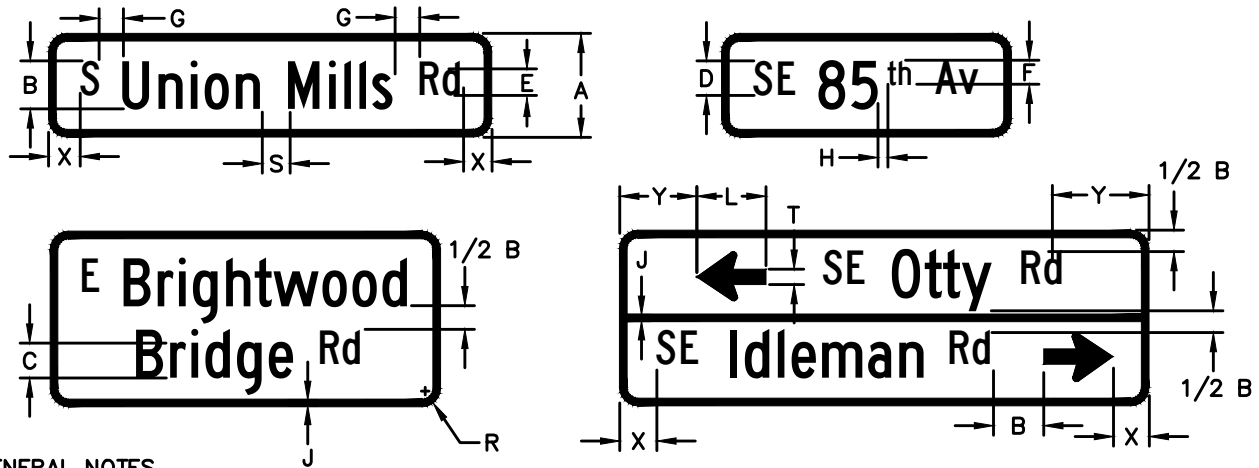

GENERAL NOTES


1. ALL SIGN CORNERS SHALL BE ROUNDED.
2. BORDERS SHALL BE FLUSH WITH EDGE OF SIGN. BORDERS ARE NOT REQUIRED ON 8" PANELS.
3. LEGEND HEIGHT FOR ALL SIGNS AT AN INTERSECTION DICTATED BY THE HIGHEST CLASSIFICATION ROADWAY.
4. SHOP DRAWINGS SHALL BE SUBMITTED TO ENGINEERING FOR REVIEW PRIOR TO INSTALLATION.
5. SEE T130 FRO ADDITIONAL REQUIREMENTS.

SIGN LEGEND

1. ALL LEGENDS ARE SUBJECT TO THE ENGINEER'S APPROVAL PRIOR TO FABRICATION.
2. LETTERING SHALL BE FHWA SERIES C AT 100% WIDTH UNLESS SPECIFIED OTHERWISE.
3. THE PREFIX SHALL BE ABBREVIATED UPPER-CASE LETTERS.
4. THE STREET NAME SHALL CONSIST OF LOWER-CASE LETTERS WITH AN INITIAL UPPER-CASE LETTER.
5. THE SUFFIX SHALL BE ABBREVIATED AND CONSIST OF AN INITIAL UPPER-CASE LETTER FOLLOWED BY LOWER-CASE LETTER(S).
6. THE DESCENDERS OF LOWERCASE LETTERS SHALL NOT BE USED IN THE VERTICAL SPACING OF THE LEGEND.

MATERIALS

1. ALL SIGN MATERIALS SHALL CONFORM TO THE CURRENT MUTCD AND ODOT STANDARD SPECIFICATIONS.
2. GROUND MOUNTED: GREEN TYPE III OR TYPE IV BACKGROUND WITH SILVER-WHITE TYPE III OR TYPE IV PERMANENT LEGEND, OR SILVER-WHITE TYPE III OR TYPE IV SHEETING BACKGROUND OVERLAID WITH GREEN TRANSPARENT PASTE BACKGROUND WITH RETROFLECTIVE SILVER-WHITE SCREENED LEGEND.
3. OVERHEAD MOUNTED: GREEN TYPE III OR TYPE IV SHEETING BACKGROUND WITH WHITE TYPE IX PERMANENT LEGEND.
4. PRIVATE STREETS: SILVER-WHITE TYPE III OR TYPE IV SHEETING BACKGROUND WITH BLACK NONREFLECTIVE SCREENED, CUT-OUT PERMANENT LEGEND.

REVISION	DATE	BY	DEPARTMENT OF TRANSPORTATION AND DEVELOPMENT 150 BEAVERCREEK ROAD OREGON CITY, OR 97045		APPROVAL DATE: 6/1/2020	SCALE: N.T.S.	STANDARD DRAWING T100
BORDER THICKNESS	1/13	CLS			STREET NAME SIGNS & DETAILS		
suffix itr. upper/lwr	1/13	CLS					
	11/19	BP					