


BOTTOM WIDTH	2 FEET MINIMUM; THE BOTTOM WIDTH SHALL BE LEVEL
DEPTH	1 FOOT MINIMUM
SIDE SLOPE	2H:1V OR FLATTER
GRADE	MAXIMUM 5 PERCENT, WITH POSITIVE DRAINAGE TO A SUITABLE OUTLET (SUCH AS SEDIMENTATION POND)

DIVERSION SWALE

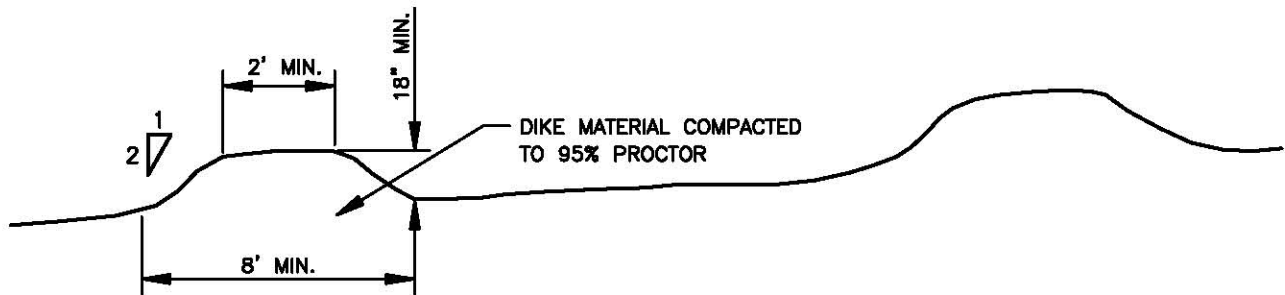

TEMPORARY DIVERSION DIKE

Slope	Spacing
<5%	300 feet
5-10%	200 feet
10-25%	100 feet
25-50%	50 feet

NOTE:
IMMEDIATELY UPON CONSTRUCTION,
ESTABLISHED VEGETATION OR EROSION
CONTROL BLANKETS ARE REQUIRED.

DIVERSION DIKE / SWALE