




PARALLEL PARKING




PASSENGER CAR
MINIMUM TURNING RADIUS

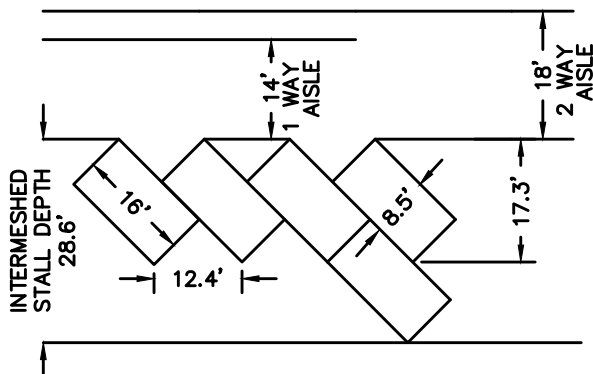

45° PARKING
STANDARD STALL (8.5'x16')

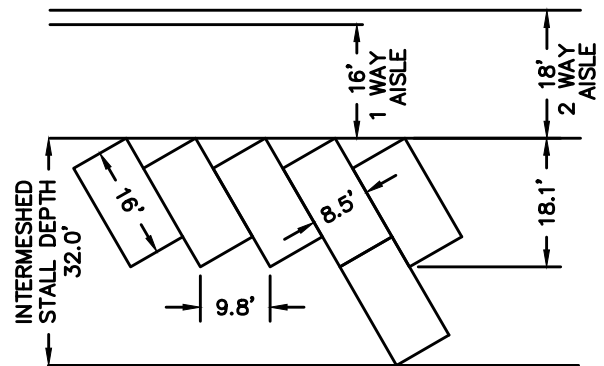

60° PARKING
STANDARD STALL (8.5'x16')

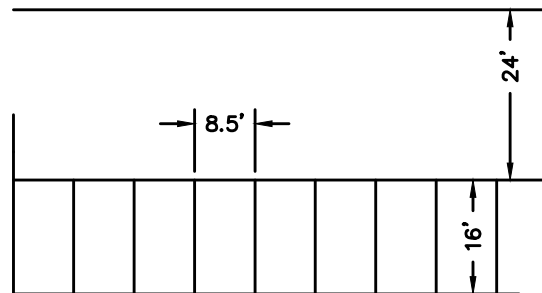

90° PARKING
STANDARD STALL (8.5'x16')

NOTES

1. SIDEWALK ADJACENT TO PARKING SHALL BE A MINIMUM OF 7 FEET WIDE IF VEHICLE OVERHANG WOULD DIMINISH SIDEWALK WIDTH.
2. DRIVE AISLES LESS THAN 20 FEET WIDE SHALL HAVE A MINIMUM 20 FOOT CLEAR ZONE BETWEEN VERTICAL OBSTRUCTIONS IF AISLE MAY RECEIVE NON PASSENGER VEHICLE TRAFFIC IN ORDER TO PROVIDE FOR EMERGENCY ACCESS AND TRUCK TRAFFIC.
3. REFER TO ZDO SECTION 1015 FOR COMPACT AND OTHER PARKING REQUIREMENTS.
4. OVERSIZED SPACES ARE ALLOWED WHEN ADEQUATE MANEUVERING AREAS ARE PROVIDED.
5. WHEELSTOPS ARE REQUIRED ON GRAVEL PARKING AREAS TO DELINEATE PARKING STALLS. WHEELSTOPS SHOULD BE BOLTED.
6. ADA PARKING DIMENSIONS AND REQUIREMENTS MAY VARY FROM THESE DIMENSIONS.

REVISION	DATE	BY	DEPARTMENT OF TRANSPORTATION AND DEVELOPMENT	APPROVAL DATE: 01/31/2020	SCALE: N.T.S.	STANDARD DRAWING
REV 1	5/19	RM				
REV 2	11/19	BP				

150 BEAVERCREEK ROAD
OREGON CITY, OR 97045



**PARKING AND AISLE
LAYOUT DETAILS (8.5' x 16')**

P200