

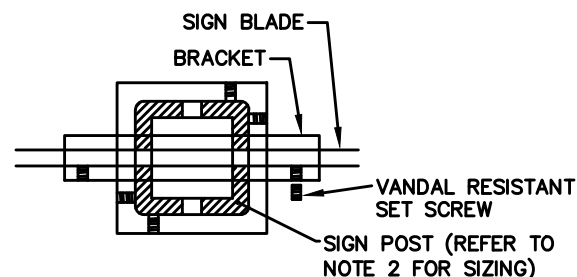


RIVET ATTACHMENT
(DETAIL 'C', TOP VIEW)

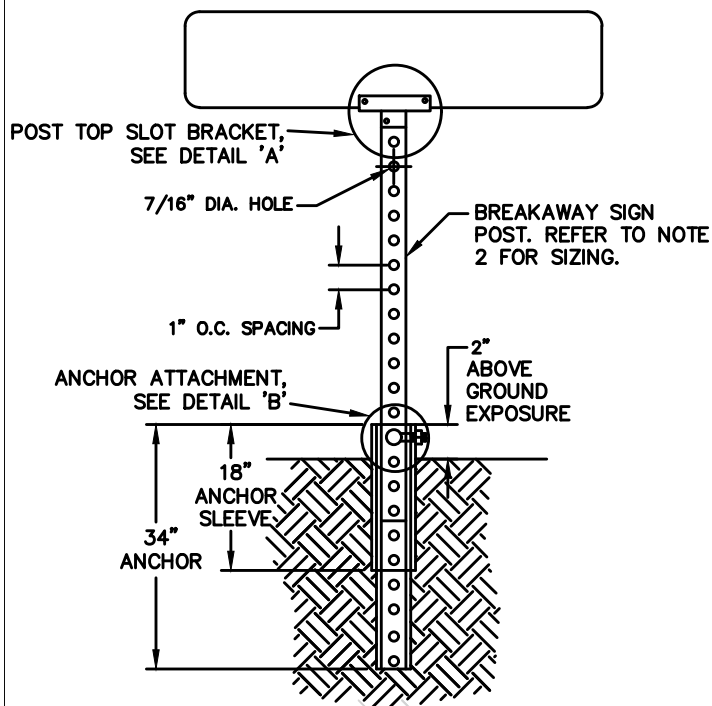

POST TOP BRACKET ATTACHMENT
(DETAIL 'A', TOP VIEW)

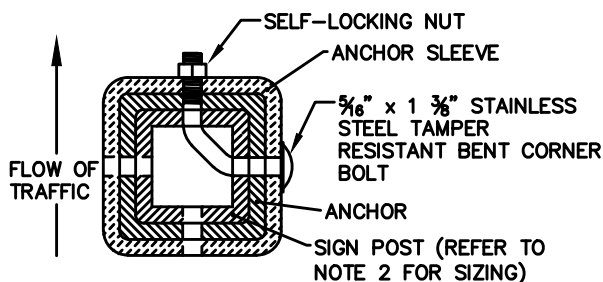

ANCHOR ATTACHMENT
(DETAIL 'B', TOP VIEW)

NOTES

1. SIGN COMBINATION AND MINIMUM SIGN MOUNTING HEIGHT SHALL DETERMINE POST LENGTH. A 10' (MIN.) POST SHALL BE USED. A COMBINATION OF SIGNS GREATER THAN 36" IN HEIGHT SHALL REQUIRE A 12' (MIN.) POST.
2. SIGN POST SIZING SHALL BE BASED ON OREGON STANDARD DRAWING TM681 (PERMANENT PERFORATED STEEL SQUARE TUBE TABLE -85 MPH). THE MINIMUM POST SIZE SHALL BE 2" X 2" 12 GA. SQUARE TUBE. IF THE SIGN PANEL AREA IS GREATER THAN THAT ALLOWED BY A 2" X 2" POST, THEN A 2 1/2" X 2 1/2" 12 GA. POST SHALL BE USED. IF A LARGER SUPPORT IS REQUIRED, THEN WOOD SIGN SUPPORTS SHALL BE USED PER OREGON STANDARD DRAWING TM670.
3. SIGN POSTS IN CONCRETE AREAS SHALL BE INSTALLED ON SURFACE-MOUNTED BREAKAWAY BASES.
4. NYLON SPACERS SHALL BE USED TO PREVENT CONTACT BETWEEN GALVANIZED STEEL AND ALUMINUM MATERIAL SURFACES.

REVISION	DATE	BY	DEPARTMENT OF TRANSPORTATION AND DEVELOPMENT	APPROVAL DATE: 01/31/2020	SCALE: N.T.S.	STANDARD DRAWING
REV 1	11/19	BP	150 BEAVERCREEK ROAD OREGON CITY, OR 97045			T150



SIGN MOUNTING AND ATTACHMENTS