

To request translation or disability-related accommodations, please contact us at:
email: wescustomerservice@clackamas.us phone: [503-742-4567](tel:503-742-4567)

Si quiere solicitar servicios de traducción o adaptaciones para la discapacidad,
contáctenos en/al
email: wescustomerservice@clackamas.us phone: [503-742-4567](tel:503-742-4567)

Чтобы запросить перевод или приспособления, связанные с инвалидностью,
пожалуйста, свяжитесь с нами по:
email: wescustomerservice@clackamas.us phone: [503-742-4567](tel:503-742-4567)


Щоб попросити переклад або спеціальні послуги для осіб з особливими
потребами, зверніться до нас, скориставшись такими контактними даними:
email: wescustomerservice@clackamas.us phone: [503-742-4567](tel:503-742-4567)

如需翻译服务或残障相关的协助，请与我们联系：
email: wescustomerservice@clackamas.us phone: [503-742-4567](tel:503-742-4567)


Để yêu cầu dịch vụ dịch thuật hoặc điều chỉnh liên quan đến tình trạng khuyết tật,
vui lòng liên hệ với chúng tôi qua
email: wescustomerservice@clackamas.us phone: [503-742-4567](tel:503-742-4567)



ESC PLAN FOR SITES 1 TO 5 ACRES

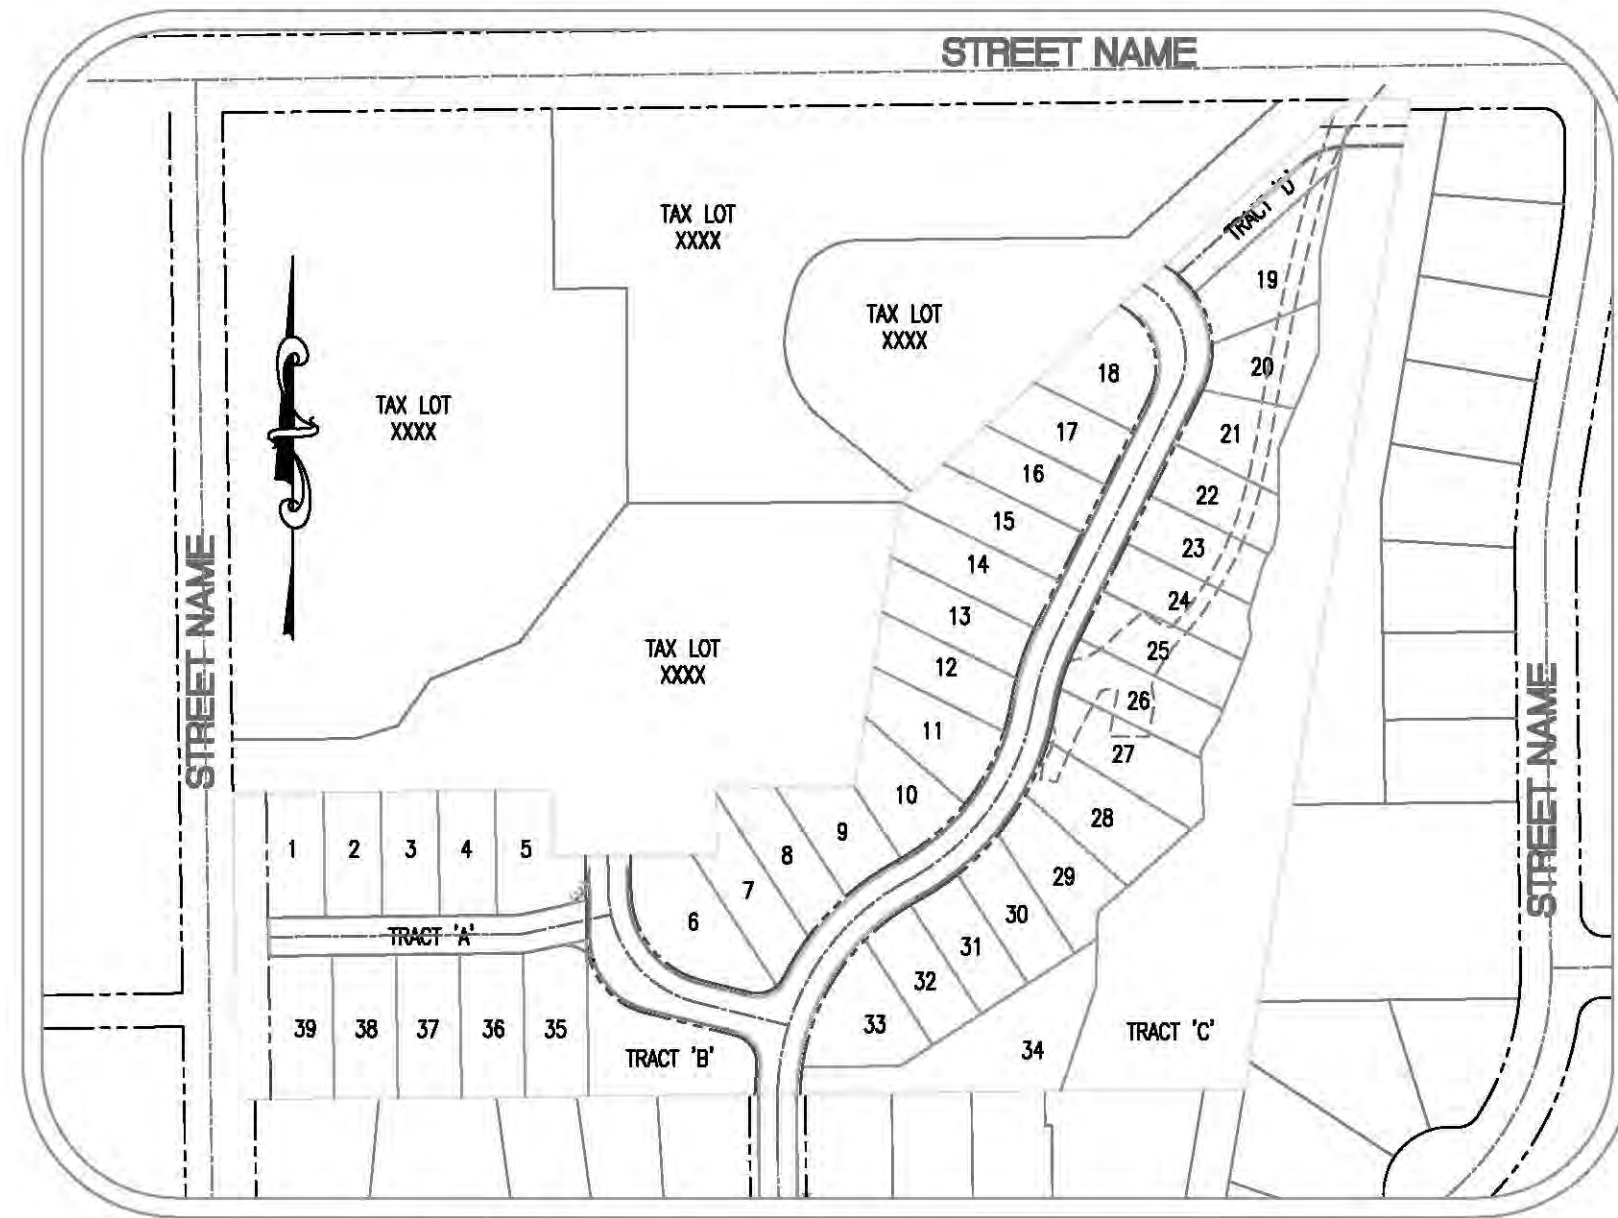

SITE MAP NOT TO SCALE

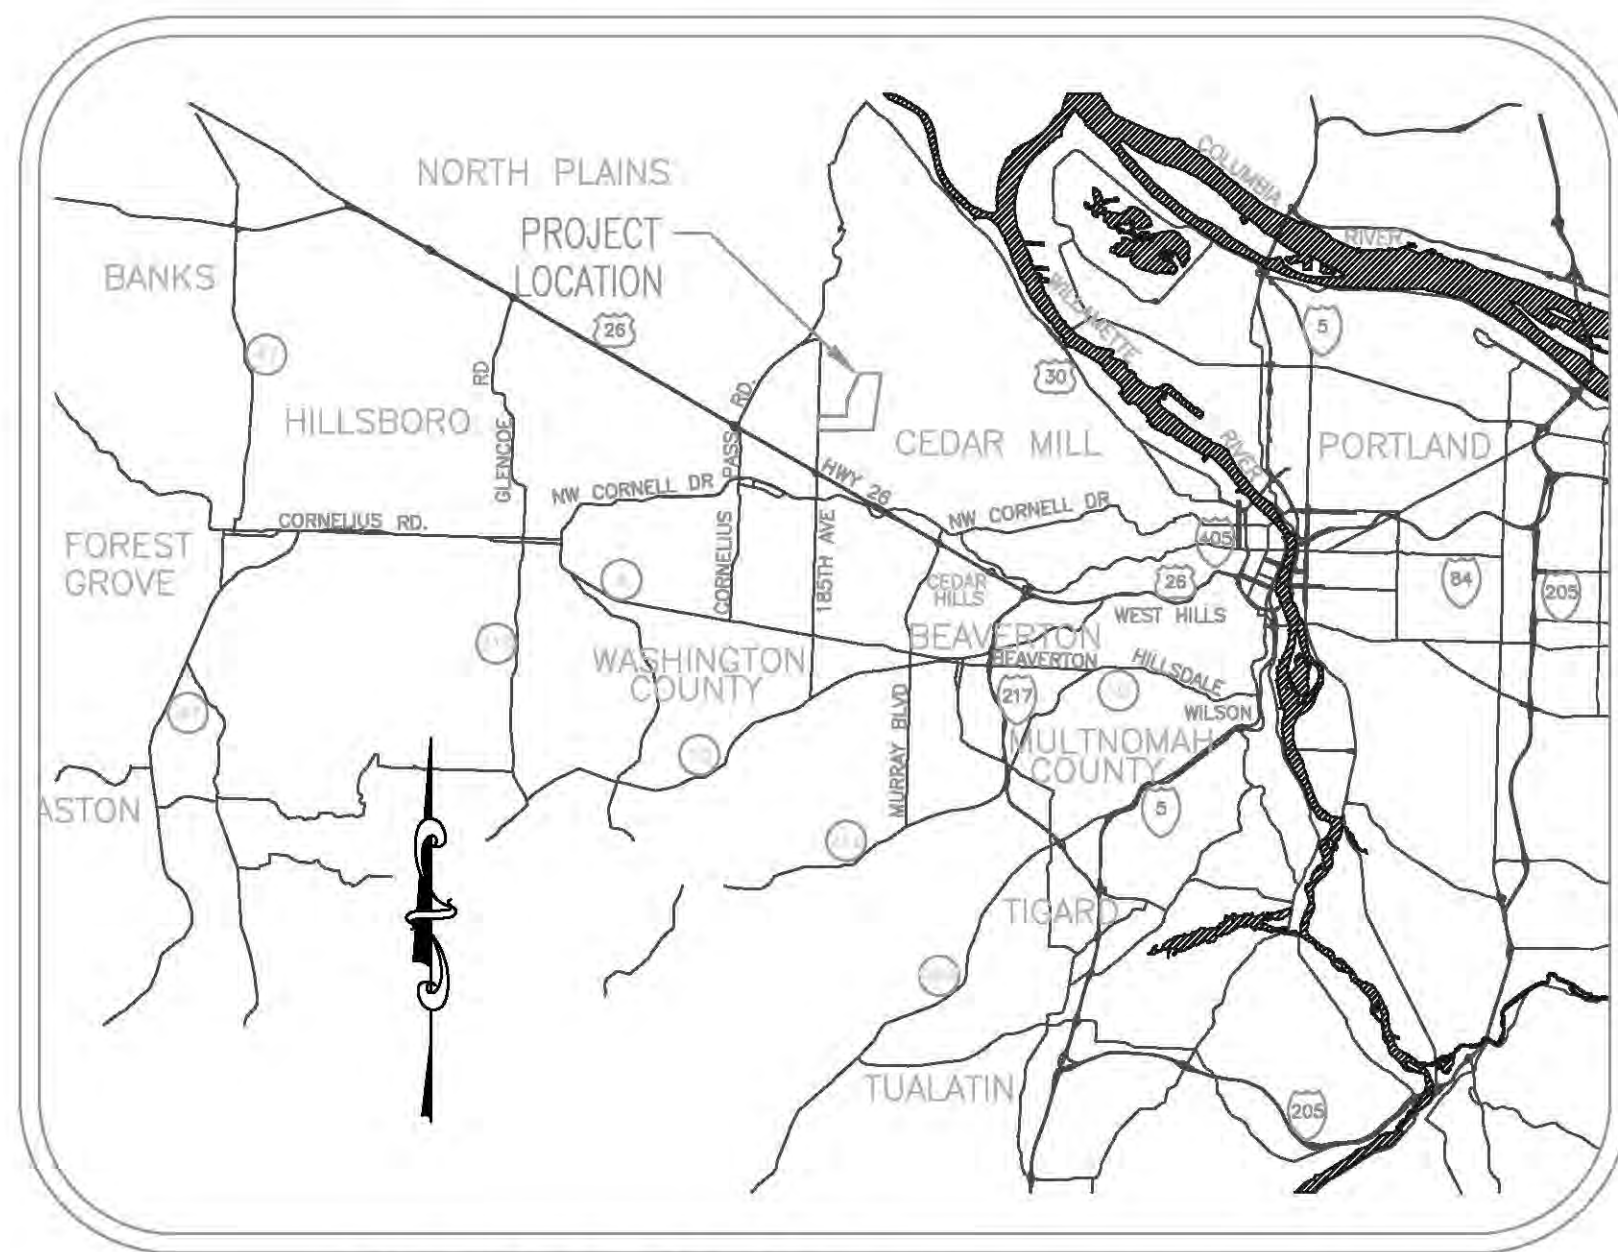

VICINITY MAP NOT TO SCALE

PROJECT LOCATION:

NEAR THE _____ WASHINGTON
 COUNTY, OREGON
 LATITUDE = XX.XXXX, LONGITUDE = XXX.XXXX

PROPERTY DESCRIPTION:

TAX LOTS _____ (WASHINGTON COUNTY TAX MAP XX-X-XXXX) LOCATED IN THE NORTHEAST 1/4 OF SECTION 30, TOWNSHIP 1 SOUTH, RANGE 1 WEST, WILLAMETTE MERIDIAN, WASHINGTON COUNTY, OREGON

ATTENTION EXCAVATORS:

OREGON LAW REQUIRES YOU TO FOLLOW RULES ADOPTED BY THE OREGON UTILITY NOTIFICATION CENTER. THOSE RULES ARE SET FORTH IN OAR 952-001-0010 THROUGH OAR 952-001-0090. YOU MAY OBTAIN COPIES OF THESE RULES FROM THE CENTER BY CALLING 503-232-1987. IF YOU HAVE ANY QUESTIONS ABOUT THE RULES, YOU MAY CONTACT THE CENTER. YOU MUST NOTIFY THE CENTER AT LEAST TWO BUSINESS DAYS, BEFORE COMMENCING AN EXCAVATION. CALL 503-246-6699.

REVISIONS:

1/23/07	Revised Inspection Frequency, and Notes
12/01/10	Updated for 1200-C issued after 01Dec10
06/02/11	Note revisions
12/15/15	Updated for 1200-CN issued after 15Dec15

EROSION AND SEDIMENT CONTROL COVER SHEET

ENGINEERING FIRM

STANDARD EROSION AND SEDIMENT CONTROL PLAN DRAWING NOTES:

- All permit registrants must implement the ESCP. Failure to implement any of the control measures or practices described in the ESCP is a violation of the permit.
- The ESCP measures shown on this plan are minimum requirements for anticipated site conditions. During the construction period, upgrade these measures as needed to comply with all applicable local, state, and federal erosion and sediment control regulations.
- Submission of all ESCP revisions is not required. Submittal of the ESCP revisions is only under specific conditions. Submit all necessary revision to DEQ or Agent.
- Phase clearing and grading to the maximum extent practical to prevent exposed inactive areas from becoming a source of erosion.
- Identify, mark, and protect (by fencing off or other means) critical riparian areas and vegetation including important trees and associated rooting zones, and vegetation areas to be preserved. Identify vegetative buffer zones between the site and sensitive areas (e.g., wetlands), and other areas to be preserved, especially in perimeter areas.
- Preserve existing vegetation when practical and re-vegetate open areas. Re-vegetate open areas when practicable before and after grading or construction. Identify the type of vegetative seed mix used.
- Erosion and sediment control measures including perimeter sediment control must be in place before vegetation is disturbed and must remain in place and be maintained, repaired, and promptly implemented following procedures established for the duration of construction, including protection for active storm drain inlets and catch basins and appropriate non-stormwater pollution controls.
- Establish concrete truck and other concrete equipment washout areas before beginning concrete work. **Direct all wash water into a pit or leak-proof container. Handle wash water as waste, concrete discharge to waters of the state is prohibited.**
- Apply temporary and/or permanent soil stabilization measures immediately on all disturbed areas as grading progresses and for all roadways including gravel roadways.
- Establish material and waste storage areas, and other non-stormwater controls.
- Prevent tracking of sediment onto public or private roads using BMPs such as: gravelled (or paved) exits and parking areas, gravel all unpaved roads located onsite, or use an exit tire wash. These BMPs must be in place prior to land-disturbing activities.
- When trucking saturated soils from the site, either use water-tight trucks or drain loads on site.
- Use BMPs to prevent or minimize stormwater exposure to pollutants from spills, vehicle and equipment fueling, maintenance, and storage; other cleaning and maintenance activities; and waste handling activities. These pollutants include fuel, hydraulic fluid, and other oils from vehicles and machinery, as well as debris, leftover paints, solvents, and glues from construction operations.
- Implement the following BMPs when applicable: written spill prevention and response procedures, employee training on spill prevention and proper disposal procedures, spill kits in all vehicles, regular maintenance schedule for vehicles and machinery, material delivery and storage controls, training and signage, and covered storage areas for waste and supplies.
- Use water, soil-binding agent or other dust control technique as needed to avoid wind-blown soil.
- The application rate of fertilizers used to reestablish vegetation must follow manufacturer's recommendations to minimize nutrient releases to surface waters. Exercise caution when using time-release fertilizers within any waterway riparian zone.
- If a stormwater treatment system (for example, electro-coagulation, flocculation, filtration, etc.) for sediment or other pollutant removal is employed, submit an operation and maintenance plan (including system schematic, location of system, location of inlet, location of discharge, discharge dispersion device design, and a sampling plan and frequency) before operating the treatment system. Obtain plan approval before operating the treatment system. Operate and maintain the treatment system according to manufacturer's specifications.
- At the end of each workday soil stockpiles must be stabilized or covered, or other BMPs must be implemented to prevent discharges to surface waters or conveyance systems leading to surface waters.
- Construction activities must avoid or minimize excavation and creation of bare ground during wet weather October 01 - May 31.
- Sediment fence: remove trapped sediment before it reaches one third of the above ground fence height and before fence removal.
- Other sediment barriers (such as biobags): remove sediment before it reaches two inches depth above ground height. and before BMP removal.
- Catch basins: clean before retention capacity has been reduced by fifty percent. Sediment basins and sediment traps: remove trapped sediments before design capacity has been reduced by fifty percent and at completion of project.
- Within 24 hours, significant sediment that has left the construction site, must be remediated. Investigate the cause of the sediment release and implement steps to prevent a recurrence of the discharge within the same 24 hours. Any in-stream clean up of sediment shall be performed according to the Oregon Division of State Lands required timeframe.
- The intentional washing of sediment into storm sewers or drainage ways must not occur. Vacuuming or dry sweeping and material pickup must be used to cleanup released sediments.
- Provide permanent erosion control measures on all exposed areas. Do not remove temporary sediment control practices until permanent vegetation or other cover of exposed areas is established. However, do remove all temporary erosion control measures as exposed areas become stabilized, unless doing so conflicts with local requirements. Properly dispose of construction materials and waste, including sediment retained by temporary BMPs.
- If vegetative seed mixes are specified, seeding must take place no later than September 1; the type and percentages of seed in the mix must be identified on the plans.
- All pumping of sediment laden water shall be discharged over an undisturbed, preferably vegetated area, and through a sediment control BMP i.e. (filter bag).
- All exposed soils must be covered during the wet weather period, October 01 - May 31.
- If water of the state is within the project site or within 50 feet of the project boundary, maintain the existing natural buffer within the 50-foot zone for the duration of the permit coverage, or maintain less than the entire existing natural buffer and provide additional erosion and sediment control BMPs.

DEVELOPER

DEVELOPER/COMPANY: _____
 CONTACT: _____
 ADDRESS 1 _____
 ADDRESS 2 _____
 PHONE: 503-_____
 FAX: 503-_____

PLANNING / ENGINEERING / SURVEYING FIRM

ENGINEERING & SURVEY FIRM
 CONTACT: _____
 ADDRESS 1 _____
 ADDRESS 2 _____
 PHONE: 503-_____
 FAX: 503-_____

NARRATIVE DESCRIPTIONS

EXISTING SITE CONDITIONS

* 3 HOMES, 3 OUT BUILDINGS, FORESTED AREAS, PASTURE AREAS, AND DRIVEWAYS

DEVELOPED CONDITIONS

* 39 LOT RESIDENTIAL SUBDIVISION WITH PUBLIC STREETS AND UTILITIES

NATURE OF CONSTRUCTION ACTIVITY AND ESTIMATED TIME TABLE

- * CLEARING (DATES, FROM & TO: _____)
- * MASS GRADING (DATES, FROM & TO: _____)
- * UTILITY INSTALLATION (DATES, FROM & TO: _____)
- * STREET CONSTRUCTION (DATES, FROM & TO: _____)
- * FINAL STABILIZATION (DATES, FROM & TO: _____)

TOTAL SITE AREA = 217,800 SF = 5.00 ACRES

TOTAL DISTURBED AREA = 174,240 SF = 4.00 ACRES

SITE SOIL CLASSIFICATION:

- 11B - CORNELIUS AND KINTON SILT LOAMS, 2 TO 7 PERCENT SLOPES
- 11D - CORNELIUS AND KINTON SILT LOAMS, 12 TO 20 PERCENT SLOPES
- 11E - CORNELIUS AND KINTON SILT LOAMS, 20 TO 30 PERCENT SLOPES
- 11F - CORNELIUS AND KINTON SILT LOAMS, 30 TO 60 PERCENT SLOPES
- 16C - DELENA SILT LOAM, 3 TO 12 PERCENT SLOPES

ON-SITE SOILS HAVE A MODERATE TO HIGH EROSION POTENTIAL. ALL FILL MATERIAL SHALL BE GENERATED ON-SITE FROM GRADING EXCAVATION AND UTILITY TRENCH SPOILS.

RECEIVING WATER BODIES:

NEAREST WATER BODY: JOHNSON CREEK

INSPECTION FREQUENCY:

SITE CONDITION	MINIMUM FREQUENCY
1. ACTIVE PERIOD	WEEKLY WHEN STORMWATER RUNOFF, INCLUDING RUNOFF FROM SNOW MELT, IS OCCURRING. AT LEAST ONCE EVERY MONTH, REGARDLESS OF WHETHER STORMWATER RUNOFF IS OCCURRING.
2. PRIOR TO THE SITE BECOMING INACTIVE OR IN ANTICIPATION OF SITE INACCESSIBILITY.	ONCE TO ENSURE THAT EROSION AND SEDIMENT CONTROL MEASURES ARE IN WORKING ORDER. ANY NECESSARY MAINTENANCE AND REPAIR MUST BE MADE PRIOR TO LEAVING THE SITE.
3. INACTIVE PERIODS GREATER THAN FOURTEEN (14) CONSECUTIVE CALENDAR DAYS.	ONCE EVERY MONTH.
4. PERIODS DURING WHICH THE SITE IS INACCESSIBLE DUE TO INCLEMENT WEATHER.	IF PRACTICAL, INSPECTIONS MUST OCCUR DAILY AT A RELEVANT AND ACCESSIBLE DISCHARGE POINT OR DOWNSTREAM LOCATION.
5. PERIODS DURING WHICH DISCHARGE IS UNLIKELY DUE TO FROZEN CONDITIONS.	MONTHLY. RESUME MONITORING IMMEDIATELY UPON MELT, OR WHEN WEATHER CONDITIONS MAKE DISCHARGES LIKELY.

- * HOLD A PRE-CONSTRUCTION MEETING OF PROJECT CONSTRUCTION PERSONNEL THAT INCLUDES THE INSPECTOR TO DISCUSS EROSION AND SEDIMENT CONTROL MEASURES AND CONSTRUCTION LIMITS.
- * ALL INSPECTIONS MUST BE MADE IN ACCORDANCE WITH DEQ 1200-CN PERMIT REQUIREMENTS.
- * INSPECTION LOGS MUST BE KEPT IN ACCORDANCE WITH DEQ'S 1200-CN PERMIT REQUIREMENTS.
- * RETAIN A COPY OF THE ESCP AND ALL REVISIONS ON SITE AND MAKE IT AVAILABLE ON REQUEST TO DEQ, AGENT, OR THE LOCAL MUNICIPALITY. DURING INACTIVE PERIODS OF GREATER THAN SEVEN (7) CONSECUTIVE CALENDAR DAYS, RETAIN THE ESCP AT THE CONSTRUCTION SITE OR AT ANOTHER LOCATION.

THE PERMITTEE IS REQUIRED TO MEET ALL THE CONDITIONS OF THE 1200-CN PERMIT. THIS ESCP AND GENERAL CONDITIONS HAVE BEEN DEVELOPED TO FACILITATE COMPLIANCE WITH THE 1200-CN PERMIT REQUIREMENTS. IN CASES OF DISCREPANCIES OR OMISSIONS, THE 1200-CN PERMIT REQUIREMENTS SUPERCEDE REQUIREMENTS OF THIS PLAN.

BMP MATRIX FOR CONSTRUCTION PHASES

REFER TO DEQ GUIDANCE MANUAL FOR A COMPREHENSIVE LIST OF AVAILABLE BMP'S.

	CLEARING	MASS GRADING	UTILITY INSTALLATION	STREET CONSTRUCTION	FINAL STABILIZATION	WET WEATHER (OCT. 1 - MAY 31ST)
EROSION PREVENTION						
PRESERVE NATURAL VEGETATION	** X	X	X	X	X	X
GROUND COVER					X	X
HYDRAULIC APPLICATIONS					X	X
PLASTIC SHEETING					X	X
MATTING					X	X
DUST CONTROL	X	X	X	X	X	X
TEMPORARY PERMANENT SEEDING	X	X	X	X	X	X
BUFFER ZONE	** X	X	X	X	X	X
OTHER:						
SEDIMENT CONTROL						
SEDIMENT FENCE (PERIMETER)	** X	X	X	X	X	X
SEDIMENT FENCE (INTERIOR)				X	X	X
STRAW MATS			X	X	X	X
FILTER BERM	X	X	X	X	X	X
INLET PROTECTION	** X	X	X	X	X	X
SEDIMENTING	X	X	X	X	X	X
SEDIMENT TRAP	X	X	X	X	X	X
NATURAL BUFFER ENCRICHMENT						
	* X	* X	* X	* X	* X	* X
OTHER:						
RUN OFF CONTROL						
CONSTRUCTION ENTRANCE	** X	X	X	X	X	X
PIPE SLOPE DRAIN	X	X	X	X	X	X
OUTLET PROTECTION	X	X	X	X	X	X
SURFACE ROUSING	X	X	X	X	X	X
CHECK DAMS	** X	X	X	X	X	X
OTHER:						
POLLUTION PREVENTION						
PROPER STORAGE	X	X	X	X	X	X
HAZ WASTE MGMT	X	X	X	X	X	X
SPILL KIT ON-SITE	X	X	X	X	X	X
CONCRETE WASHOUT AREA	X	X	X	X	X	X
OTHER:						

* SIGNIFIES ADDITIONAL BMP'S REQUIRED FOR WORK WITHIN 50' OF WATER OF THE STATE.
 ** SIGNIFIES BMP THAT WILL BE INSTALLED PRIOR TO ANY GROUND DISTURBING ACTIVITY.

RATIONALE STATEMENT

A COMPREHENSIVE LIST OF AVAILABLE BEST MANAGEMENT PRACTICES (BMP) OPTIONS BASED ON DEQ'S GUIDANCE MANUAL HAS BEEN REVIEWED TO COMPLETE THIS EROSION AND SEDIMENT CONTROL PLAN. SOME OF THE ABOVE LISTED BMP'S WERE NOT CHOSEN BECAUSE THEY WERE DETERMINED TO NOT EFFECTIVELY MANAGE EROSION PREVENTION AND SEDIMENT CONTROL FOR THIS PROJECT BASED ON SPECIFIC SITE CONDITIONS, INCLUDING SOIL CONDITIONS TOPOGRAPHIC CONSTRAINTS, ACCESSIBILITY TO THE SITE, AND OTHER RELATED CONDITIONS, AS THE PROJECT PROGRESSES AND THERE IS A NEED TO REVISE THE ESC PLAN, AN ACTION PLAN WILL BE SUBMITTED.

INITIAL _____
PERMITTEE'S SITE INSPECTOR: JOE INSPECTOR
 COMPANY/AGENCY: _____
 PHONE: _____
 FAX: _____
 E-MAIL: _____
 DESCRIPTION OF EXPERIENCE: 10 YEARS OF EXPERIENCE IN THE CONSTRUCTION INDUSTRY, OF WHICH 5 YEARS WERE SPENT INSTALLING AND MAINTAINING EROSION CONTROL MEASURES. ATTENDED AN 8 HOUR TRAINING COURSE ON THE PRINCIPLES AND PRACTICES OF EROSION CONTROL AT THE UNIVERSITY OF WASHINGTON. ATTENDED IECA CONFERENCE IN 2008 AND 2013.

SHEET INDEX

EROSION AND SEDIMENT CONTROL PLANS

- C050 EROSION AND SEDIMENT CONTROL COVER SHEET
- C051 CLEARING AND DEMOLITION EROSION AND SEDIMENT CONTROL PLAN
- C052 GRADING, STREET AND UTILITY CONSTRUCTION EROSION AND SEDIMENT CONTROL PLAN
- C053 EROSION AND SEDIMENT CONTROL DETAILS
- C054 EROSION AND SEDIMENT CONTROL DETAILS

REVISIONS:

1/23/07	Revised Inspection Frequency, and Notes
12/01/10	Updated for 1200-C issued after 01Dec10
06/02/11	Note revisions
12/15/15	Updated for 1200-CN issued after 15Dec15

EROSION AND SEDIMENT CONTROL COVER SHEET

ENGINEERING FIRM

DESIGNED BY: XXXX DRAWING NO.: XXXX
 DRAWN BY: XXXX SCALE: XXXX
 CHECKED BY: XXXX
 PREPARED FOR: CLEAN WATER SERVICES
 2550 SW HILLSBORO HIGHWAY
 HILLSBORO, OR 97123
 PHONE: 503-681-3600
 FAX: 503-681-3603

PROJECT NAME
WASHINGTON COUNTY OREGON
 TAX LOTS _____ WASHINGTON COUNTY TAX MAP _____

DATE: _____
 JOB NUMBER: XXXX
 SHEET: XXXX

LEGEND

- FINISHED GRADE CONTOUR (2 FT)
- FINISHED GRADE CONTOUR (10 FT)
- SEDIMENT BARRIER (PERIMETER)
- SEDIMENT BARRIER (INTERIOR)
- ORANGE CONSTRUCTION FENCE
- BRUSH BARRIER
- CHECK DAM
- CONSTRUCTION ENTRANCE
- DIVERSION DIKE
- DIVERSION SWALE
- DIVERSION DIKE/SWALE
- INLET PROTECTION
- SEDIMENT MAT
- TEMPORARY SLOPE DRAIN
- COMPOST BLANKET
- SEEDING & MULCHING
- CONCRETE WASH AREA
- OUTLET PROTECTION
- ROCK FILTER BERM
- TEMPORARY SLOPE STABILIZATION MEASURES
- LONG TERM SLOPE STABILIZATION MEASURES
- NEW IMPERVIOUS SURFACE
- DRAINAGE FLOW DIRECTION


GRADING, STREET AND UTILITY EROSION AND SEDIMENT CONSTRUCTION NOTES:

1. SEED USED FOR TEMPORARY OR PERMANENT SEEDING SHALL BE COMPOSED OF ONE OF THE FOLLOWING MIXTURES, UNLESS OTHERWISE AUTHORIZED:
 - A. VEGETATED CORRIDOR AREAS REQUIRE NATIVE SEED MIXES. SEE RESTORATION PLAN FOR APPROPRIATE SEED MIX.
 - B. DWARF GRASS MIX (MIN. 100 LB./AC.)
 1. DWARF PERENNIAL RYEGRASS (80% BY WEIGHT)
 2. CREEPING RED FESCUE (20% BY WEIGHT)
 - C. STANDARD HEIGHT GRASS MIX (MIN. 100LB./AC.)
 1. ANNUAL RYEGRASS (40% BY WEIGHT)
 2. TURF-TYPE FESCUE (60% BY WEIGHT)
2. SLOPE TO RECEIVE TEMPORARY OR PERMANENT SEEDING SHALL HAVE THE SURFACE ROUGHENED BY MEANS OF TRACK-WALKING OR THE USE OF OTHER APPROVED IMPLEMENTS. SURFACE ROUGHENING IMPROVES SEED BEDDING AND REDUCES RUN-OFF VELOCITY.
3. LONG TERM SLOPE STABILIZATION MEASURES SHALL INCLUDE THE ESTABLISHMENT OF PERMANENT VEGETATIVE COVER VIA SEEDING WITH APPROVED MIX AND APPLICATION RATE.
4. TEMPORARY SLOPE STABILIZATION MEASURES SHALL INCLUDE: COVERING EXPOSED SOIL WITH PLASTIC SHEETING, STRAW MULCHING, WOOD CHIPS, OR OTHER APPROVED MEASURES.
5. STOCKPILED SOIL OR STRIPPINGS SHALL BE PLACED IN A STABLE LOCATION AND CONFIGURATION. DURING "WET WEATHER" PERIODS, STOCKPILES SHALL BE COVERED WITH PLASTIC SHEETING OR STRAW MULCH. SEDIMENT FENCE IS REQUIRED AROUND THE PERIMETER OF THE STOCKPILE.
6. EXPOSED CUT OR FILL AREAS SHALL BE STABILIZED THROUGH THE USE OF TEMPORARY SEEDING AND MULCHING, EROSION CONTROL BLANKETS OR MATS, MID-SLOPE SEDIMENT FENCES OR WATTLES, OR OTHER APPROPRIATE MEASURES. SLOPES EXCEEDING 25% MAY REQUIRE ADDITIONAL EROSION CONTROL MEASURES.
7. AREAS SUBJECT TO WIND EROSION SHALL USE APPROPRIATE DUST CONTROL MEASURES INCLUDING THE APPLICATION OF A FINE SPRAY OF WATER, PLASTIC SHEETING, STRAW MULCHING, OR OTHER APPROVED MEASURES.
8. CONSTRUCTION ENTRANCES SHALL BE INSTALLED AT THE BEGINNING OF CONSTRUCTION AND MAINTAINED FOR THE DURATION OF THE PROJECT. ADDITIONAL MEASURES INCLUDING, BUT NOT LIMITED TO, TIRE WASHES, STREET SWEEPING, AND VACUUMING MAY BE REQUIRED TO INSURE THAT ALL PAVED AREAS ARE KEPT CLEAN FOR THE DURATION OF THE PROJECT.
9. ACTIVE INLETS TO STORM WATER SYSTEMS SHALL BE PROTECTED THROUGH THE USE OF APPROVED INLET PROTECTION MEASURES. ALL INLET PROTECTION MEASURES ARE TO BE REGULARLY INSPECTED AND MAINTAINED AS NEEDED.
10. SATURATED MATERIALS THAT ARE HAULED OFF-SITE MUST BE TRANSPORTED IN WATER-TIGHT TRUCKS TO ELIMINATE SPILLAGE OF SEDIMENT AND SEDIMENT-LADEN WATER.
11. AN AREA SHALL BE PROVIDED FOR THE WASHING OUT OF CONCRETE TRUCKS IN A LOCATION THAT DOES NOT PROVIDE RUN-OFF THAT CAN ENTER THE STORM WATER SYSTEM. IF THE CONCRETE WASH-OUT AREA CAN NOT BE CONSTRUCTED GREATER THAN 50' FROM ANY DISCHARGE POINT, SECONDARY MEASURES SUCH AS BERMS OR TEMPORARY SETTLING PITS MAY BE REQUIRED. THE WASH-OUT SHALL BE LOCATED WITHIN SIX FEET OF TRUCK ACCESS AND BE CLEANED WHEN IT REACHES 50% OF THE CAPACITY.
12. SWEEPINGS FROM EXPOSED AGGREGATE CONCRETE SHALL NOT BE TRANSFERRED TO THE STORM WATER SYSTEM. SWEEPINGS SHALL BE PICKED UP AND DISPOSED IN THE TRASH.
13. AVOID PAVING IN WET WEATHER WHEN PAVING CHEMICALS CAN RUN-OFF INTO THE STORM WATER SYSTEM.
14. USE BMPs SUCH AS CHECK-DAMS, BERMS, AND INLET PROTECTION TO PREVENT RUN-OFF FROM REACHING DISCHARGE POINTS.
15. COVER CATCH BASINS, MANHOLES, AND OTHER DISCHARGE POINTS WHEN APPLYING SEAL COAT, TACK COAT, ETC. TO PREVENT INTRODUCING THESE MATERIALS TO THE STORM WATER SYSTEM.

EROSION AND SEDIMENT CONTROL BMP IMPLEMENTATION:

1. ALL BASE ESC MEASURES (INLET PROTECTION, PERIMETER SEDIMENT CONTROL, GRAVEL CONSTRUCTION ENTRANCES, ETC.) MUST BE IN PLACE, FUNCTIONAL, AND APPROVED IN AN INITIAL INSPECTION, PRIOR TO COMMENCEMENT OF CONSTRUCTION ACTIVITIES.
2. "STOCK PILE AREA 1" SHALL BE MOVED TO "STOCK PILE AREA 2" FOLLOWING THE EXCAVATION CUT ACTIVITIES.
3. THE "STAGING, EQUIPMENT MAINTENANCE, FUELING, PORTA-POTTY, AND SOLID WASTE AREA 1" SHALL BE MOVED TO "STAGING, EQUIPMENT MAINTENANCE, FUELING, PORTA-POTTY, AND SOLID WASTE AREA 2" FOLLOWING EXCAVATION "CUT" ACTIVITIES.
4. ALL "SEDIMENT BARRIERS (TO BE INSTALLED AFTER GRADING)" SHALL BE INSTALLED IMMEDIATELY FOLLOWING ESTABLISHMENT OF FINISHED GRADE AS SHOWN ON THESE PLANS.
5. LONG TERM SLOPE STABILIZATION MEASURES "INCLUDING MATTING" SHALL BE IN PLACE OVER ALL EXPOSED SOILS BY OCTOBER 1.
6. THE STORM WATER FACILITY SHALL BE CONSTRUCTED AND LANDSCAPED PRIOR TO THE STORM WATER SYSTEM FUNCTIONING AND SITE PAVING.
7. INLET PROTECTION SHALL BE IN-PLACE IMMEDIATELY FOLLOWING PAVING ACTIVITIES.

THESE EROSION AND SEDIMENT CONTROL PLANS ASSUME "DRY WEATHER" CONSTRUCTION. "WET WEATHER" CONSTRUCTION MEASURES NEED TO BE APPLIED BETWEEN OCTOBER 1ST AND MAY 31ST.

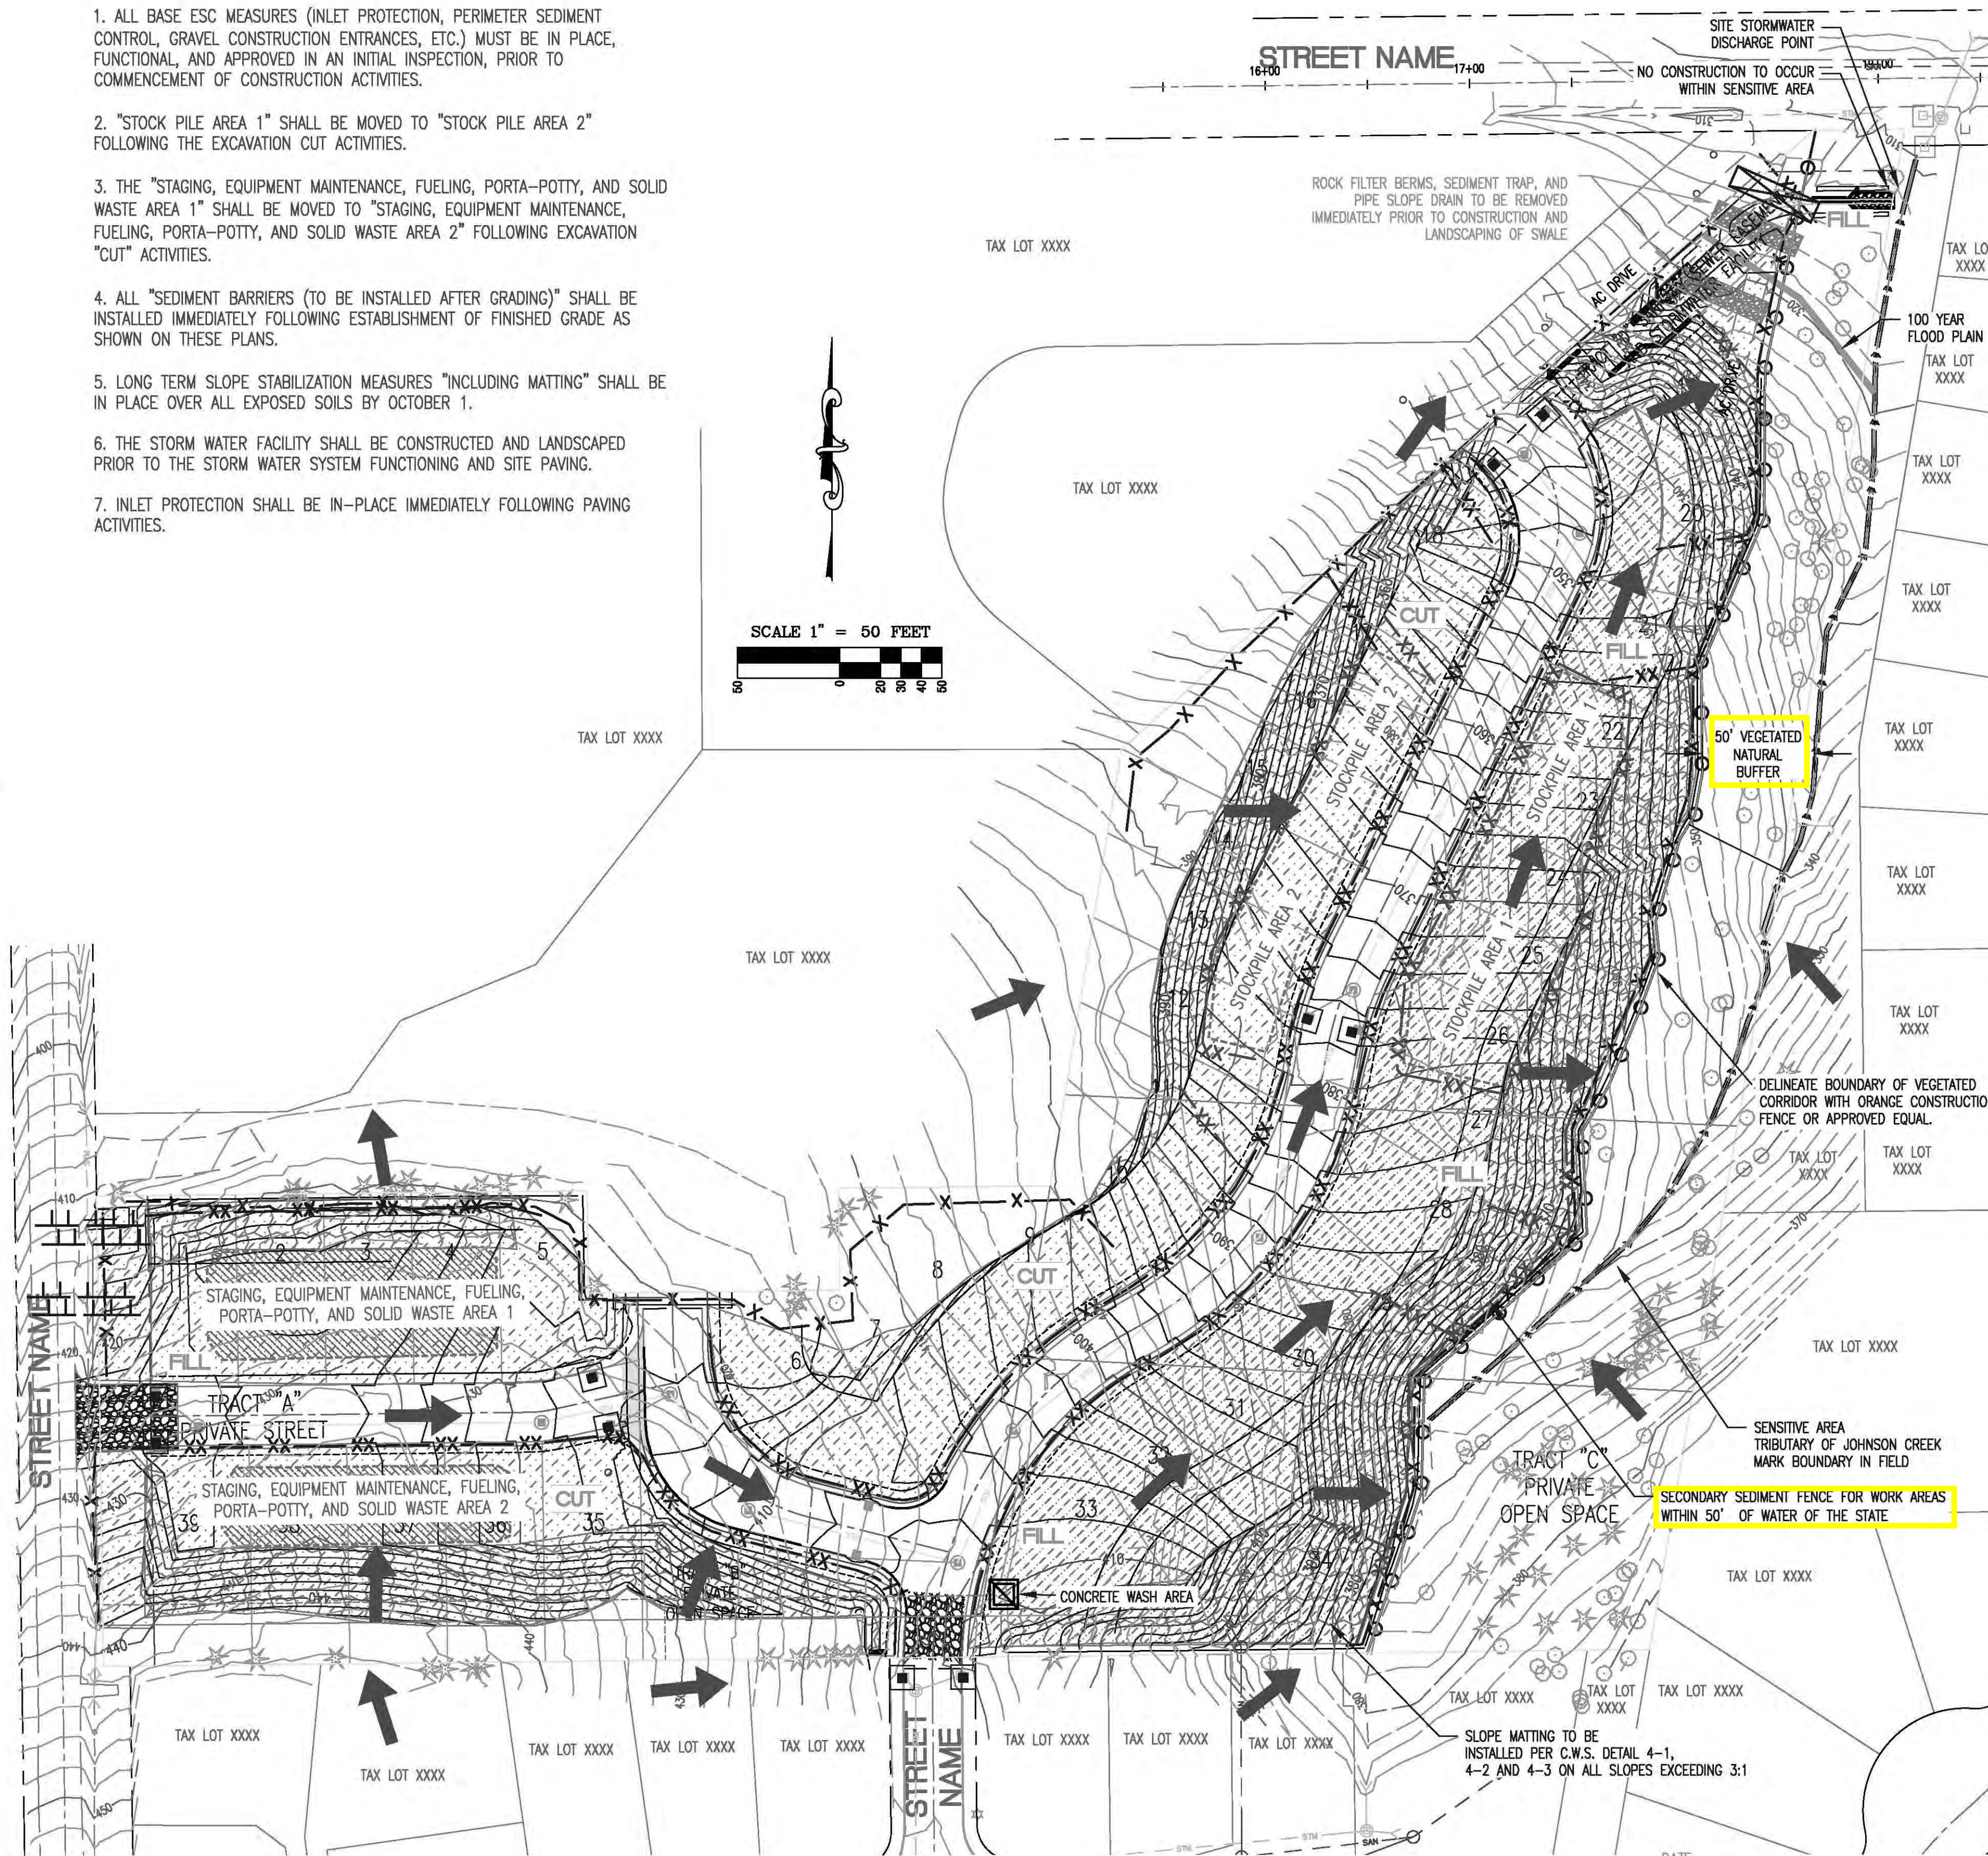

REVISIONS:

UTILITY + STREET CONST.
 GRADING + STABILIZATION
 EROSION/SED CONTROL PLAN

ENGINEERING FIRM

DESIGNED BY:	DRAWING NO.:
DRAWN BY:	SCALE: AS NOTED
CHECKED BY:	
PREPARED FOR:	

PROJECT NAME
 WASHINGTON COUNTY OREGON
 WASHINGTON COUNTY TAX MAP


DATE: _____

THIS IS A PLACE HOLDER
 ENGINEER
 PRELIMINARY DESIGN
 OREGON
 REMOVE FOR STAMPING

JOB NUMBER
 XXXX


SHEET
 XXX-XXX

EXPIRES: Month Day Year

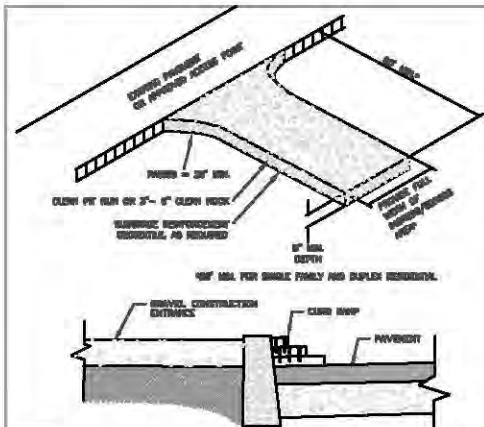


- NOTES:**
1. SEE DISTANCE SHALL BE MAINTAINED IN A MANNER THAT WILL PREVENT TRUCKS OR FLAMES OF EQUIPMENT FROM PLACING RUBBISH ON-ROAD. THIS MAY REQUIRE TOP DRESSING, REPAIR AND/OR CLEAN UP OF ANY RUBBISH LEFT TO TOP DRESSING.
 2. STAKE PLACEMENT SHALL BE TO BE DETERMINED TO ESTABLISH PROPER PAVEMENT GRAD-UP. SEE CHAPTER 4 OF CLEAN WATER SERVICES EROSION CONTROL MANUAL FOR MORE INFORMATION.
 3. STAKE PLACEMENT SHALL BE TO BE DETERMINED TO ESTABLISH PROPER PAVEMENT GRAD-UP. SEE CHAPTER 4 OF CLEAN WATER SERVICES EROSION CONTROL MANUAL FOR MORE INFORMATION.
 4. STAKE PLACEMENT SHALL BE TO BE DETERMINED TO ESTABLISH PROPER PAVEMENT GRAD-UP. SEE CHAPTER 4 OF CLEAN WATER SERVICES EROSION CONTROL MANUAL FOR MORE INFORMATION.
 5. STAKE PLACEMENT SHALL BE TO BE DETERMINED TO ESTABLISH PROPER PAVEMENT GRAD-UP. SEE CHAPTER 4 OF CLEAN WATER SERVICES EROSION CONTROL MANUAL FOR MORE INFORMATION.
 6. STAKE PLACEMENT SHALL BE TO BE DETERMINED TO ESTABLISH PROPER PAVEMENT GRAD-UP. SEE CHAPTER 4 OF CLEAN WATER SERVICES EROSION CONTROL MANUAL FOR MORE INFORMATION.

CONSTRUCTION ENTRANCE
 Detail Drawing 8-2
 REVISED 12-08
 CleanWater Services
 Our commitment to clean.

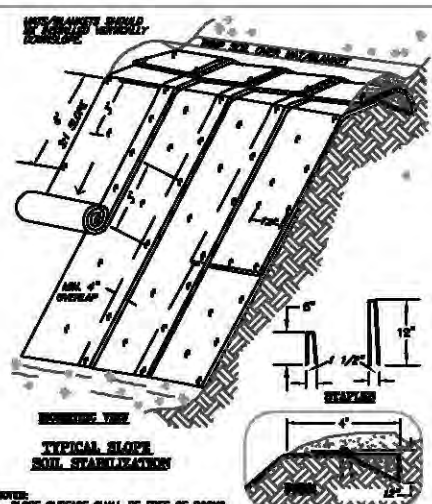


- NOTES:**
1. SLOPE SURFACE SHALL BE FREE OF ROCKS, CLODS, STICKS AND GRASS MATS/BLANKETS SHALL HAVE GOOD SOIL CONTACT.
 2. APPLY PERMANENT STAPLES BEFORE PLACING MATTING.
 3. LAY MATTING LOOSELY AND STAKE OR STAPLE TO MAINTAIN DIRECT CONTACT WITH THE SOIL TO HOLD MATTING.
 4. STAPLES OR STAPLING LAYOUT PER MANUFACTURER'S SPECIFICATIONS.

TYPICAL SLOPE SOIL STABILIZATION
 Detail Drawing 8-3
 REVISED 12-08
 CleanWater Services
 Our commitment to clean.

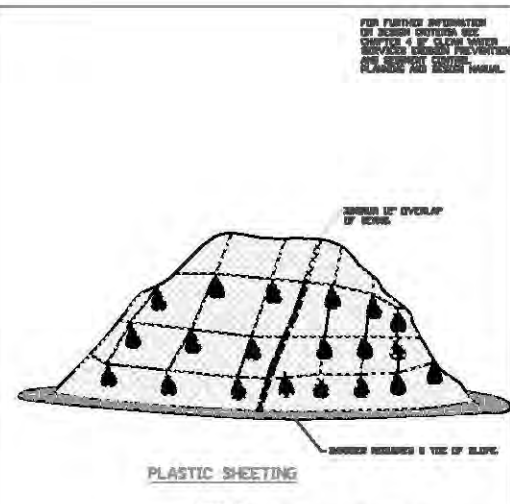


- NOTES:**
1. MINIMUM 12" OVERLAP OF ALL SEAMS REQUIRED.
 2. BARBER REQUIRED @ TOE OF STOCK PILE.
 3. COVERING MAINTAINED TIGHTLY IN PLACE BY USING SANDBAGS OR TIES ON ROPES WITH A MINIMUM 10' GRID SPACING IN ALL DIRECTIONS.
 4. STAPLES OR STAPLING LAYOUT PER MANUFACTURER'S SPECIFICATIONS.

PLASTIC SHEETING
 Detail Drawing 8-4
 REVISED 12-08
 CleanWater Services
 Our commitment to clean.

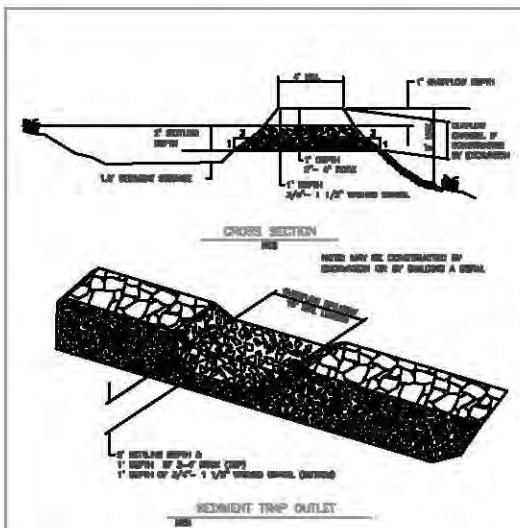

- NOTE:**
 A FILTER FABRIC FENCE OR SIMILAR FILTER MUST BE CONSTRUCTED TO FILTER RUNOFF FROM THE SEDIMENT TRAP PRIOR TO DISCHARGE FROM THE CONSTRUCTION SITE.

SEDIMENT TRAP
 Detail Drawing 4-3
 REVISED 12-08
 CleanWater Services
 Our commitment to clean.

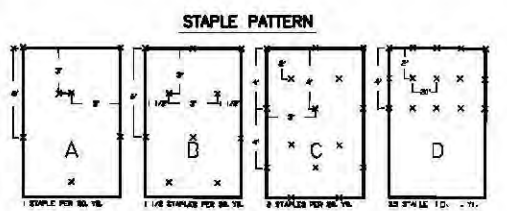

LENGTH AND SLOPE TABLE

Channel Type	Channel Width	Channel Slope	Staple Pattern
LOW FLOW CHANNEL	41"	1:1	A
	31"	1:1	B
MEDIUM FLOW CHANNEL	31"	1:1	B
	21"	1:1	C
HIGH FLOW CHANNEL	11"	1:1	C
	11"	1:1	D

MINIMUM STAPLE PATTERN GUIDE AND RECOMMENDATION FOR SLOPE AND CHANNEL APPLICATION.
STAPLE TABLE
 Detail Drawing 4-3
 Page 4-31

REVISIONS:

EROSION AND SEDIMENT CONTROL DETAILS

ENGINEERING FIRM

DESIGNED BY: _____
 DRAWN BY: _____
 CHECKED BY: _____
 PREPARED FOR: _____

PROJECT NAME
 WASHINGTON COUNTY
 OREGON
 WASHINGTON COUNTY TAX MAP _____

THIS IS A PLACE TO BE ENGINEERED
 PRELIMINARY DESIGN
 OREGON
 EXPIRES MONTH DAY YEAR

JOB NUMBER: XXXX
 SHEET: XXXX