



PLAN

# NOTES

1. SPECIFICATIONS FOR CONCRETE AND MISC. MATERIALS USED IN CONSTRUCTION SHALL CONFORM TO THE CURRENT APWA STANDARD SPECIFICATIONS.
2. CONCRETE SHALL HAVE A MINIMUM COMPRESSIVE STRENGTH OF 3300 PSI IN 28 DAYS.
3. REFER TO ODOT STANDARD DRAWING RD370 FOR MORE INFORMATION.
4. NO PORTION OF DITCH INLET SHALL BE CONSTRUCTED HIGHER THAN THE ROADWAY SUBGRADE WITHOUT PRIOR APPROVAL UNLESS THE STRUCTURE IS GREATER THAN 10 FEET FROM THE EDGE OF PAVEMENT.

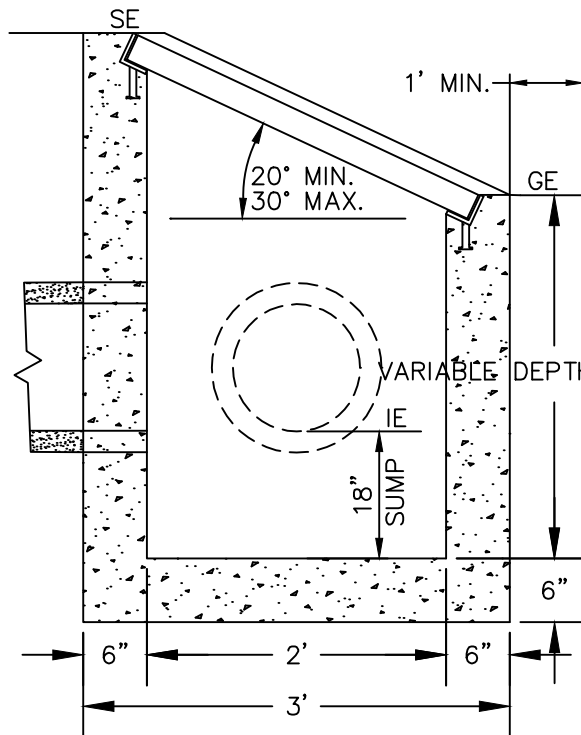


SECTION A-A

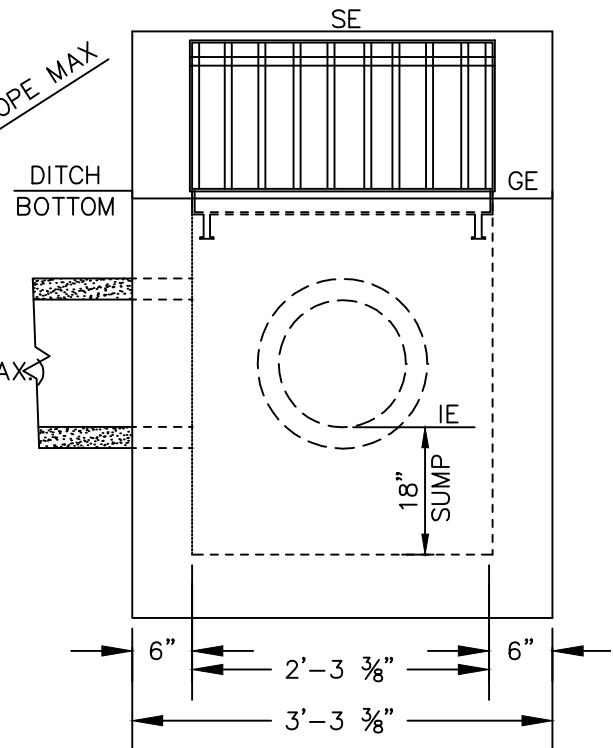

SECTION B-B

PLANS SHALL ILLUSTRATE:

SE = TOP OF STRUCTURE ELEVATION  
 GE = GRATE INVERT ELEVATION  
 IE = INVERT ELEVATION

REVISION	DATE	BY	DEPARTMENT OF TRANSPORTATION AND DEVELOPMENT	APPROVAL DATE: 2/1/13	SCALE: N.T.S.	STANDARD DRAWING
ADD NOTE 4	12/12	RN	150 BEAVERCREEK ROAD OREGON CITY, OR 97045		<b>STANDARD DITCH INLET</b>	<b>S300</b>
ADD GE, SE, IE	12/12	RN				