


ARTERIAL ROADWAY SECTIONS

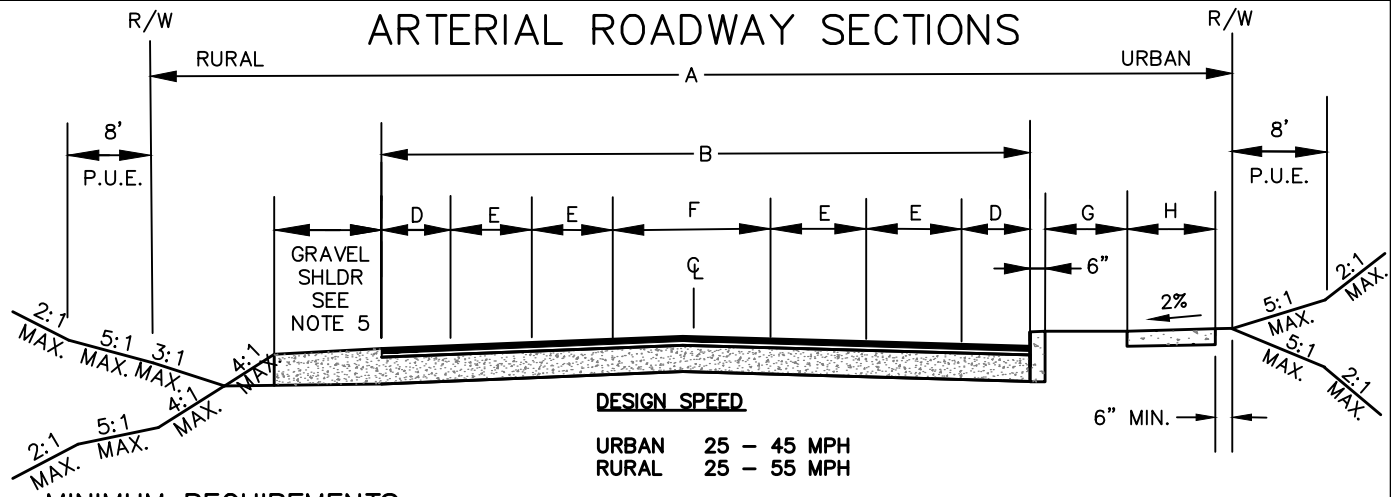

DESIGN SPEED
 URBAN 25 - 45 MPH
 RURAL 25 - 55 MPH

MINIMUM REQUIREMENTS

ROAD TYPE	RIGHT-OF-WAY (FT)	PAVED WIDTH (FT)	NO. OF LANES	BIKE FACILITY (FT)	TRAVEL LANE (FT)	CENTER TURN LANE (FT)	PARKING (FT)	LANDSCAPE STRIP (FT)	SIDEWALK (FT)
	A	B	C	D	E	F	W ADD'L R/W	G	H
URBAN	70	40	2	8	12	0	W ADD'L R/W	5	5-7
URBAN	80	40	3	8	12	14	W ADD'L R/W	5	5-7
URBAN	90	64	4	8	12	0	W ADD'L R/W	5	5-7
URBAN	104	78	5	8	12	14	W ADD'L R/W	5	5-7
UNINCORPORATED RURAL COMMUNITY	62	40	2	8	12	0	NONE	5	5-7
UNINCORPORATED RURAL COMMUNITY	78	54	3	8	12	14	NONE	5	5-6
RURAL	60	40	2	8	12	0	NONE	NONE	NONE
	78	54	3	8	12	14	NONE	NONE	NONE

NOTES

- SEE DRAWING C100 FOR DETAILS ON THE STRUCTURAL SECTION.
- MAXIMUM GRADE RESIDENTIAL = 12%.
- MAXIMUM GRADE COMMERCIAL/INDUSTRIAL/MULTIFAMILY = 8%.
- CROSS SLOPE SHALL BE 2-4% (INCLUDING SHOULDER).
- SLOPES SHALL BE RECOVERABLE WITHIN THE CLEAR ZONE PER SECTION 245.
- GRAVEL SHOULDERS ARE ALLOWED FOR RURAL AREAS ONLY (UNLESS REQUIRED. FOR SURFACE WATER MANAGEMENT) SHOULDERS SHALL BE FULL DEPTH OF ROAD SECTION AND THE WIDTH SHALL BE BASED ON AASHTO GREEN BOOK TABLE 6-5.
- AN 8 FOOT WIDE PUBLIC UTILITY EASEMENT (PUE) IN ADDITION TO THE RIGHT OF WAY.
- SEE ZDO SECTION 1007 FOR SIDEWALK WIDTH REQUIREMENTS. IN LOCATIONS WHERE CURB AND SIDEWALK ARE NOT REQUIRED A PAVED OR GRAVEL SHOULDER IS REQUIRED.
- THESE STANDARD SHALL APPLY EXCEPT WHERE COMPREHENSIVE PLAN REQUIREMENTS SPECIFY A DIFFERING SECTION.
- LEFT TURN LANES OR RIGHT TURN LANES SHALL BE PROVIDED PER THE COMPREHENSIVE PLAN, CIP OR AS WARRANTED BY SECTION 295. RIGHT TURN LANE WIDTHS SHALL BE MINIMUM OF 12 FEET WIDE BUT BASED UPON A TRUCK TURNING MOVEMENT ASSESSMENT.
- LANE WIDTHS MAY VARY PER COMPREHENSIVE PLAN CROSS SECTIONS AS WARRANTED BY SECTION 250.6.5.
- THE REQUIREMENT FOR PARKING SHALL BE DETERMINED BY ENGINEERING BASED UPON ADJACENT LANE USE, HEAVY VEHICLE TRAFFIC, EXISTING TRAVEL LANE WIDTH, PARKING NEEDS, DESIGN SPEED AND CRASH HISTORY.
- TURN LANES, PARKING, MEDIANS, PEDESTRIAN REFUGES AND ISLAND SHALL BE PROVIDED AS DETERMINE BY ENGINEERING AND MAY REQUIRE ADDITIONAL RIGHT OF WAY. RAISED MEDIANS AREA REQUIRED ON FIVE LANE ROADWAYS
- BICYCLE FACILITIES SHALL BE CONSISTENT WITH THE ACTIVE TRANSPORTATION PLAN AND TRANSPORTATION SYSTEM PLAN.

<small>REVISION</small>	<small>DATE</small>	<small>BY</small>	DEPARTMENT OF TRANSPORTATION AND DEVELOPMENT 150 BEAVERCREEK ROAD OREGON CITY, OR 97045	 CLACKAMAS COUNTY	<small>APPROVAL DATE:</small> 6/1/2020	<small>SCALE:</small> N.T.S.	STANDARD DRAWING
<small>REVISION</small>	11/20	RM			<h2 style="margin: 0;">ARTERIAL ROADWAY SECTION</h2>	<h1 style="margin: 0;">C140</h1>	