




HAMMERHEAD

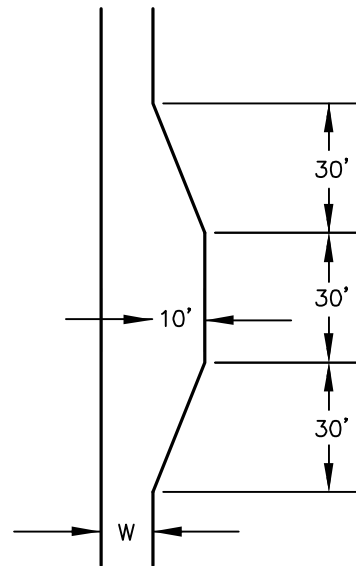

TURNOUT

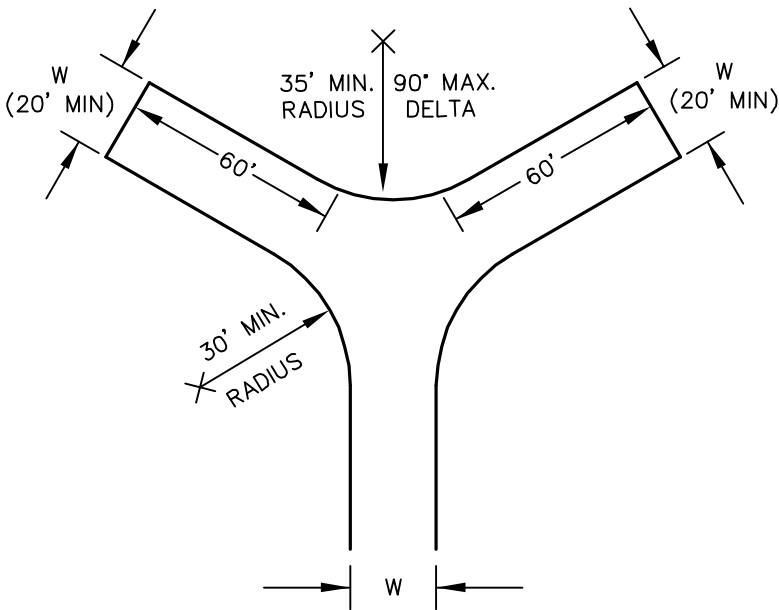

HAMMERHEAD ALTERNATIVE 1

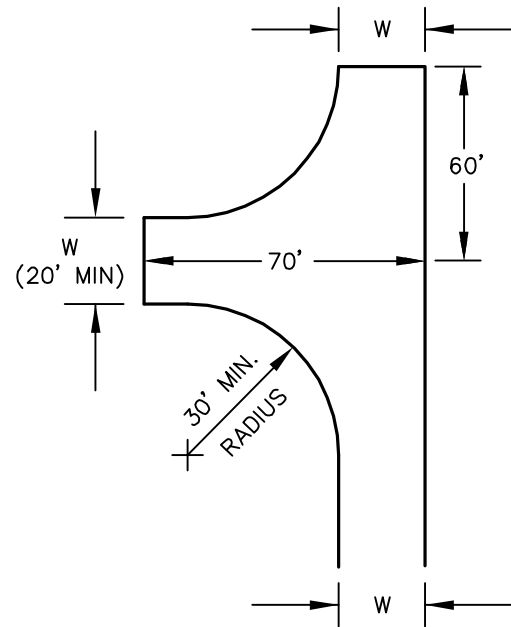

HAMMERHEAD ALTERNATIVE 2

NOTES

1. W = DRIVEABLE WIDTH, OR AS REQUIRED BY THE LAND USE CONDITIONS OF APPROVAL OR ROADWAY STANDARDS.
2. FOR ROADWAY WIDTHS LESS THAN 20 FEET, THE MINIMUM CENTERLINE RADIUS SHALL BE 50 FEET. FOR ROADWAY WIDTHS 20 FEET OR GREATER, THE MINIMUM CENTERLINE RADIUS SHALL BE 40 FEET.
3. FIRE DISTRICT APPROVAL MAY EXCEED THESE STANDARDS.
4. SEE APPENDIX F OF THE FIRE CODE APPLICATION GUIDE.

S:\Engineering\Traffic\Projects\Current\Projects\RoadwayStandards\Roadway Standards\TAR Standard drawings\Standard Drawings Revised C100-D700.dwg

REVISION	DATE	BY

DEPARTMENT OF TRANSPORTATION
AND DEVELOPMENT
150 BEAVERCREEK ROAD
OREGON CITY, OR 97045



APPROVAL DATE: 1/1/10

SCALE: N.T.S.

TRUCK TURNAROUND & TURNOUTS FOR
PUBLIC/PRIVATE ROADS & DRIVEWAYS

STANDARD
DRAWING

C350