To request translation or disability-related accommodations, please contact us at **DTDcompliance@clackamas.us** | **503-742-4400**.

Si quiere solicitar servicios de traducción o adaptaciones para la discapacidad, contáctenos en/al **DTDcompliance@clackamas.us** | **503-742-4400**.

Чтобы запросить перевод или приспособления, связанные с инвалидностью, пожалуйста, свяжитесь с нами по:
DTDcompliance@clackamas.us | **503-742-4400**.

Щоб попросити переклад або спеціальні послуги для осіб з особливими потребами, зверніться до нас, скориставшись такими контактними даними:
DTDcompliance@clackamas.us | **503-742-4400**.

如需翻译服务或残障相关的协助，请与我们联系：
DTDcompliance@clackamas.us | **503-742-4400**。


Để yêu cầu dịch vụ dịch thuật hoặc điều chỉnh liên quan đến tình trạng khuyết tật, vui lòng liên hệ với chúng tôi qua **DTDcompliance@clackamas.us** | **503-742-4400.**

Clackamas County
www.clackamas.us

LEGEND DIMENSIONING TABLE

LOCATION	STREET CLASSIFICATION	POSTED SPEED (MPH)	PANEL HT.	PRIMARY LETTER HT.	LOWER-CASE LETTER HT.	SUPPLEMENTAL LETTERING SIZE		SUPER-SCRIPT HT.			BORDER/ DIVIDER THICK-NESS	BOR-DER RAD.	ARROW TAIL THICK-NESS	ARROW LENGTH
						UPPER	LOWER							
			A	B	C	D	E	F	G	H	J	R	T	L
GROUND MOUNT	ARTERIAL/COLLECTOR 4+ LANES	> 40	15	8	6	5	3 3/4	4	3 1/8	1	1/2	1 1/2		
	ARTERIAL/COLLECTOR 4+ LANES	≤ 40	12	6	4 1/2	4	3	3	2 1/2	3/4	1/2	1 1/2		
	ARTERIAL/COLLECTOR 2-3 LANES	ALL												
	LOCAL	> 25												
	ALTERNATE *		10	5	4	4	3	2 1/2	2	1/2	1/2	1 1/2		
	STACKED LEGEND	ALL	21	6	4 1/2	4	3	3	2 1/2	3/4	1/2	1 1/2	2 1/4	9
	LOCAL/CONNECTOR	≤ 25	8	5	3 3/4	3	1 7/8	2 1/2	1 1/2	1/2				
	PRIVATE	ALL												
OVERHEAD MAST ARM	ALL	ALL	21	12	9	8	6	6	5	1 3/4	1	3		
	ALTERNATE **		18	10	8	6	4 1/2	5	3 3/4	1 1/4	1	3		
	STACKED LEGEND	ALL	30	8	6	5	3 3/4	4	3 1/8	1	1	3	3	12

NOTES: ALL UNITS IN INCHES UNLESS SHOWN OTHERWISE.
S = SPACE BETWEEN WORDS = 5/8 B.
X, Y = 1/2 OF REMAINING SPACE. SHOULD BE APPROXIMATELY EQUAL TO LETTER HT (B) AND NO LESS THAN 1/2 B.
* GROUND MOUNTED: MAY BE USED IF 6" LETTERS YIELD SIGNS GREATER THAN 60" LENGTH.
** OVERHEAD: MAY BE USED IF 12" LETTERS YIELD SIGNS GREATER THAN 12' LENGTH.

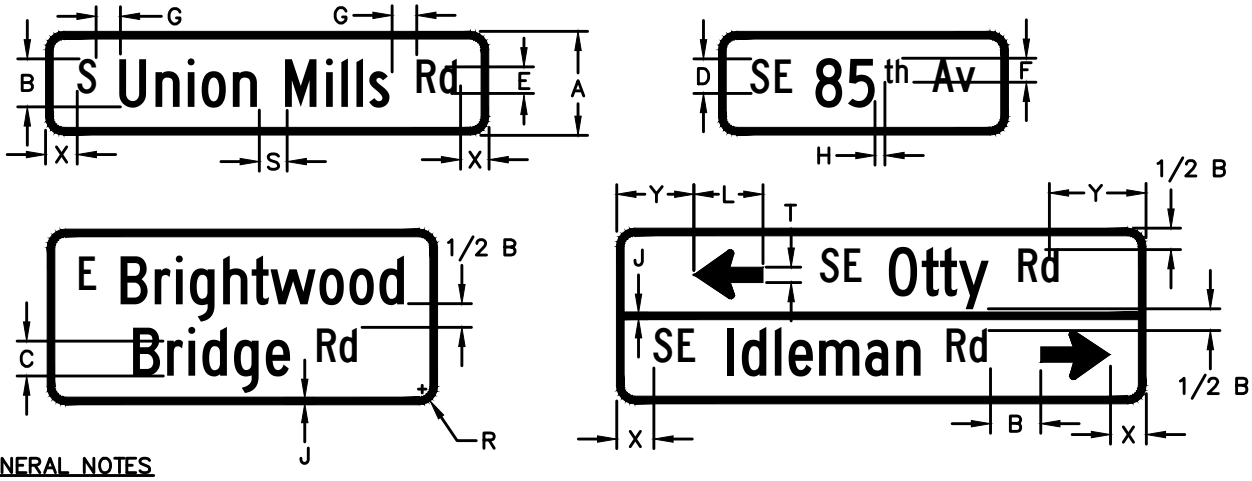

GENERAL NOTES

1. ALL SIGN CORNERS SHALL BE ROUNDED.
2. BORDERS SHALL BE FLUSH WITH EDGE OF SIGN. BORDERS ARE NOT REQUIRED ON 8" PANELS.
3. LEGEND HEIGHT FOR ALL SIGNS AT AN INTERSECTION DICTATED BY THE HIGHEST CLASSIFICATION ROADWAY.
4. SHOP DRAWINGS SHALL BE SUBMITTED TO ENGINEERING FOR REVIEW PRIOR TO INSTALLATION.
5. SEE T130 FRO ADDITIONAL REQUIREMENTS.

SIGN LEGEND

1. ALL LEGENDS ARE SUBJECT TO THE ENGINEER'S APPROVAL PRIOR TO FABRICATION.
2. LETTERING SHALL BE FHWA SERIES C AT 100% WIDTH UNLESS SPECIFIED OTHERWISE.
3. THE PREFIX SHALL BE ABBREVIATED UPPER-CASE LETTERS.
4. THE STREET NAME SHALL CONSIST OF LOWER-CASE LETTERS WITH AN INITIAL UPPER-CASE LETTER.
5. THE SUFFIX SHALL BE ABBREVIATED AND CONSIST OF AN INITIAL UPPER-CASE LETTER FOLLOWED BY LOWER-CASE LETTER(S).
6. THE DESCENDERS OF LOWERCASE LETTERS SHALL NOT BE USED IN THE VERTICAL SPACING OF THE LEGEND.

MATERIALS

1. ALL SIGN MATERIALS SHALL CONFORM TO THE CURRENT MUTCD AND ODOT STANDARD SPECIFICATIONS.
2. GROUND MOUNTED: GREEN TYPE III OR TYPE IV BACKGROUND WITH SILVER-WHITE TYPE III OR TYPE IV PERMANENT LEGEND, OR SILVER-WHITE TYPE III OR TYPE IV SHEETING BACKGROUND OVERLAID WITH GREEN TRANSPARENT PASTE BACKGROUND WITH RETROFLECTIVE SILVER-WHITE SCREENED LEGEND.
3. OVERHEAD MOUNTED: GREEN TYPE III OR TYPE IV SHEETING BACKGROUND WITH WHITE TYPE IX PERMANENT LEGEND.
4. PRIVATE STREETS: SILVER-WHITE TYPE III OR TYPE IV SHEETING BACKGROUND WITH BLACK NONREFLECTIVE SCREENED, CUT-OUT PERMANENT LEGEND.

REVISION	DATE	BY
BORDER THICKNESS	1/13	CLS
suffix ltr. upper/lwr	1/13	CLS
	11/19	BP

DEPARTMENT OF TRANSPORTATION AND DEVELOPMENT
150 BEAVERCREEK ROAD
OREGON CITY, OR 97045

CLACKAMAS COUNTY

APPROVAL DATE: 6/1/2020 SCALE: N.T.S.

STREET NAME SIGNS & DETAILS

STANDARD DRAWING
T100