


S:\Engineering\Traffic\Draft\Projects\Current\Projects\RoadwayStandards\TAR Standard drawings\Standard Drawings Revised 1.1.10\dwgs\C100-D700.dwg

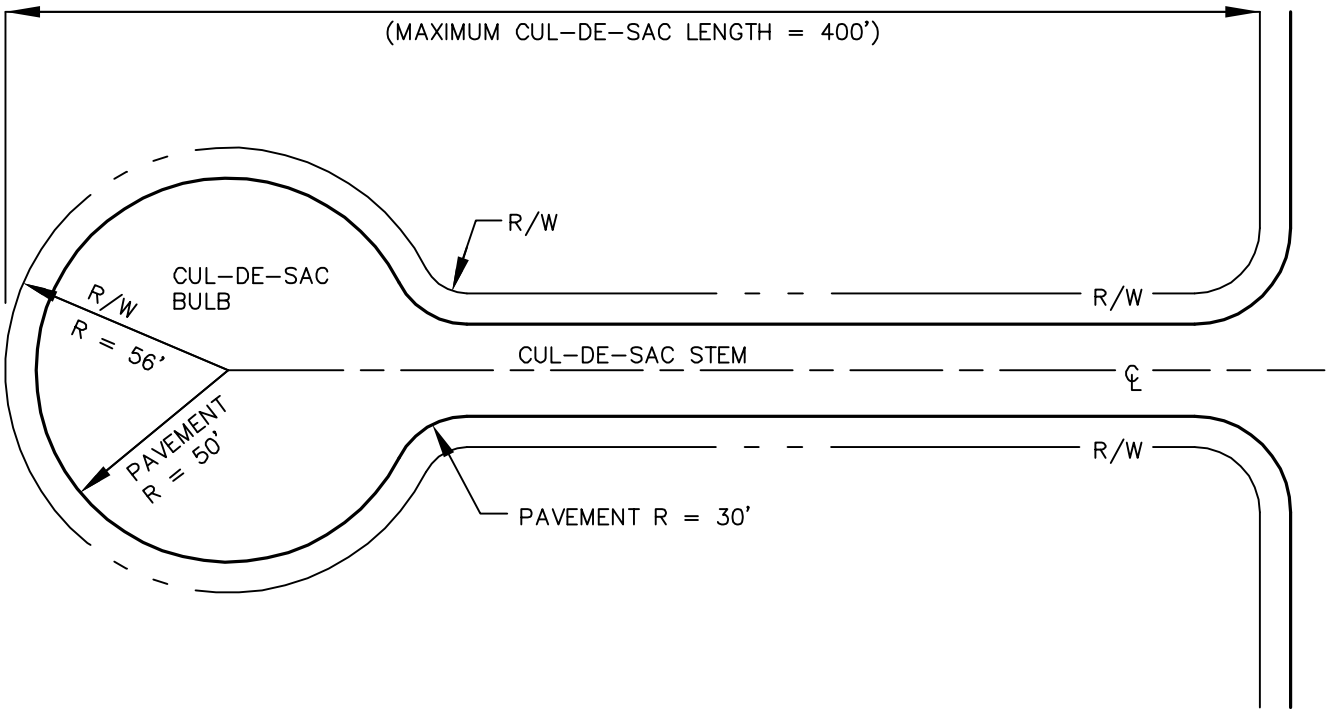

NOTES

1. CUL-DE-SACS ALLOWED ON LOCAL ROADWAYS ONLY.
2. STRUCTURAL SECTION PER STANDARD DRAWING C100.
3. CUL-DE-SAC STEM WIDTHS SHALL BE PER DRAWING C110, LOCAL ROADWAY SECTION.
4. RURAL CUL-DE-SACS SHALL HAVE A 2 FOOT WIDE GRAVEL SHOULDER IN LIEU OF CURBS.
5. HAMMERHEADS SHALL ONLY BE ALLOWED WITH COUNTY APPROVAL DEPENDENT UPON LENGTH, PHYSICAL CONSTRAINTS, AND ADT.
6. FOR CUL-DE-SACS LESS THAN 150 FEET IN LENGTH, SIDEWALK IS REQUIRED ON ONE SIDE ONLY, BUT SHALL INCLUDE THE ENTIRE CUL-DE-SAC BULB. THE CROSSING AT THE END OF THE SIDEWALK SHALL BE IN THE CUL-DE-SAC STEM AND MEET ADA REQUIREMENTS.

REVISION	DATE	BY

DEPARTMENT OF TRANSPORTATION
AND DEVELOPMENT
150 BEAVERCREEK ROAD
OREGON CITY, OR 97045



APPROVAL DATE: 1/1/10

SCALE: N.T.S.

**STANDARD CUL-DE-SAC
LOCAL ROAD**

STANDARD
DRAWING
C300